



# ALPINE ARTISAN COLLECTION

LUXURY  
VINYL  
TILES

AIRLAY 



# ALPINE ARTISAN COLLECTION

Capturing the signature look of the world's most desirable flooring materials, Artisan embraces the essence of natural finishes whilst offering the unmatched practicality of luxury vinyl tile.

The Artisan Collection is a true homage to high-quality, innovative techniques, delivering ease of maintenance and underfoot comfort. Enriched by the desire to preserve traditions, the eclectic collection is a testament to enduring beauty and cutting edge flooring technology.



ESTATE





COOL GRAVEL





LIGHT  
TERRAZZO





ONYX





LIGHT GREY  
CONCRETE






COOL  
TERRAZZO







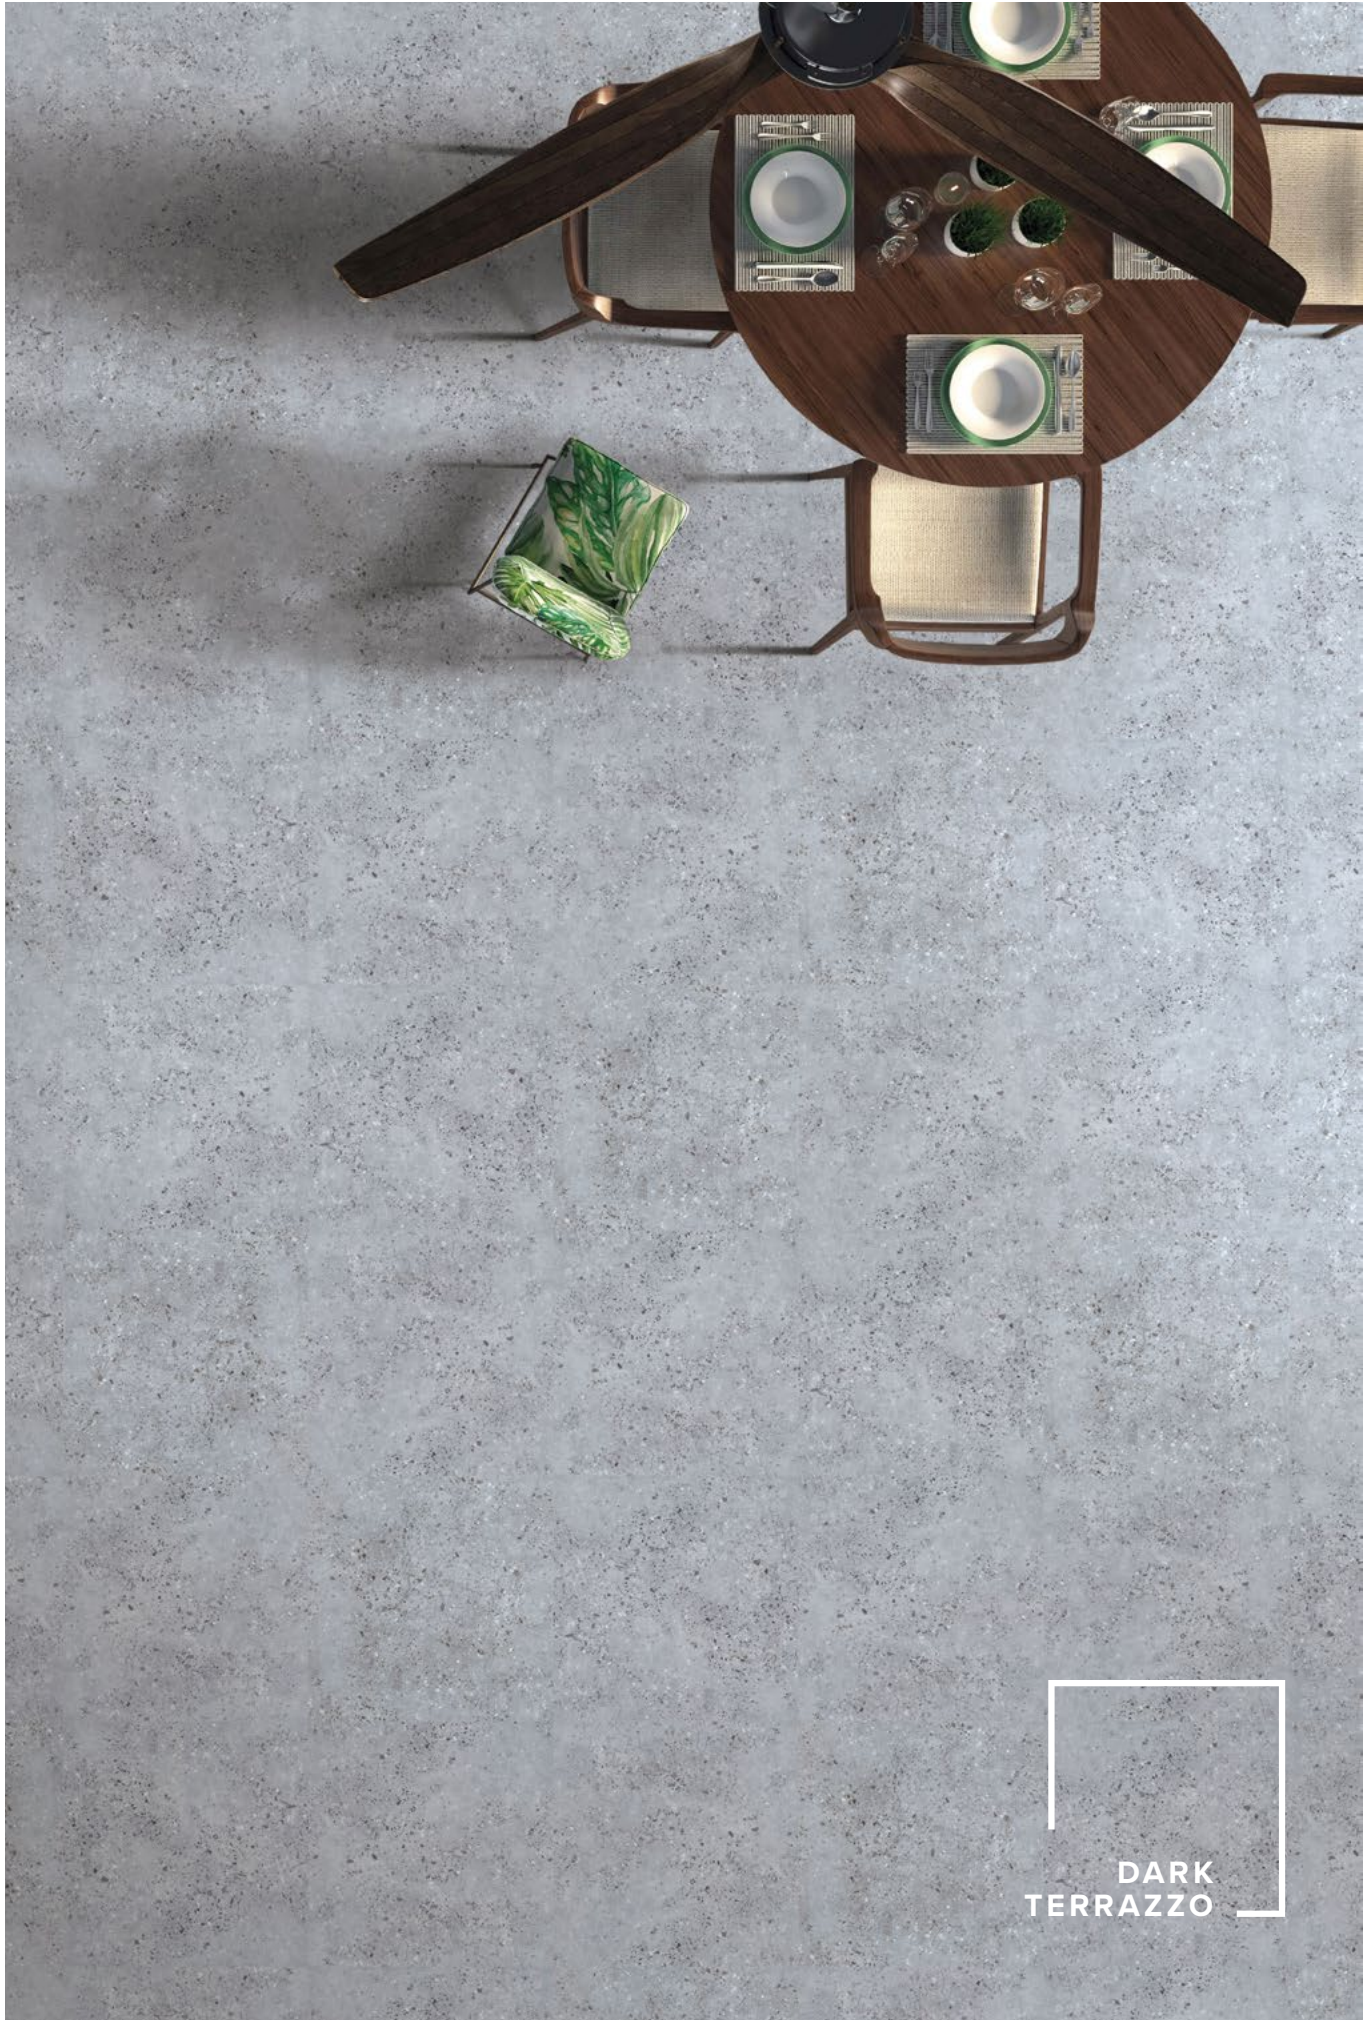

DARK  
TERRAZZO





WARM GREY  
CONCRETE






WARM  
TERRAZZO





COOL  
TERRAZZO  
& LIGHT  
TERRAZZO



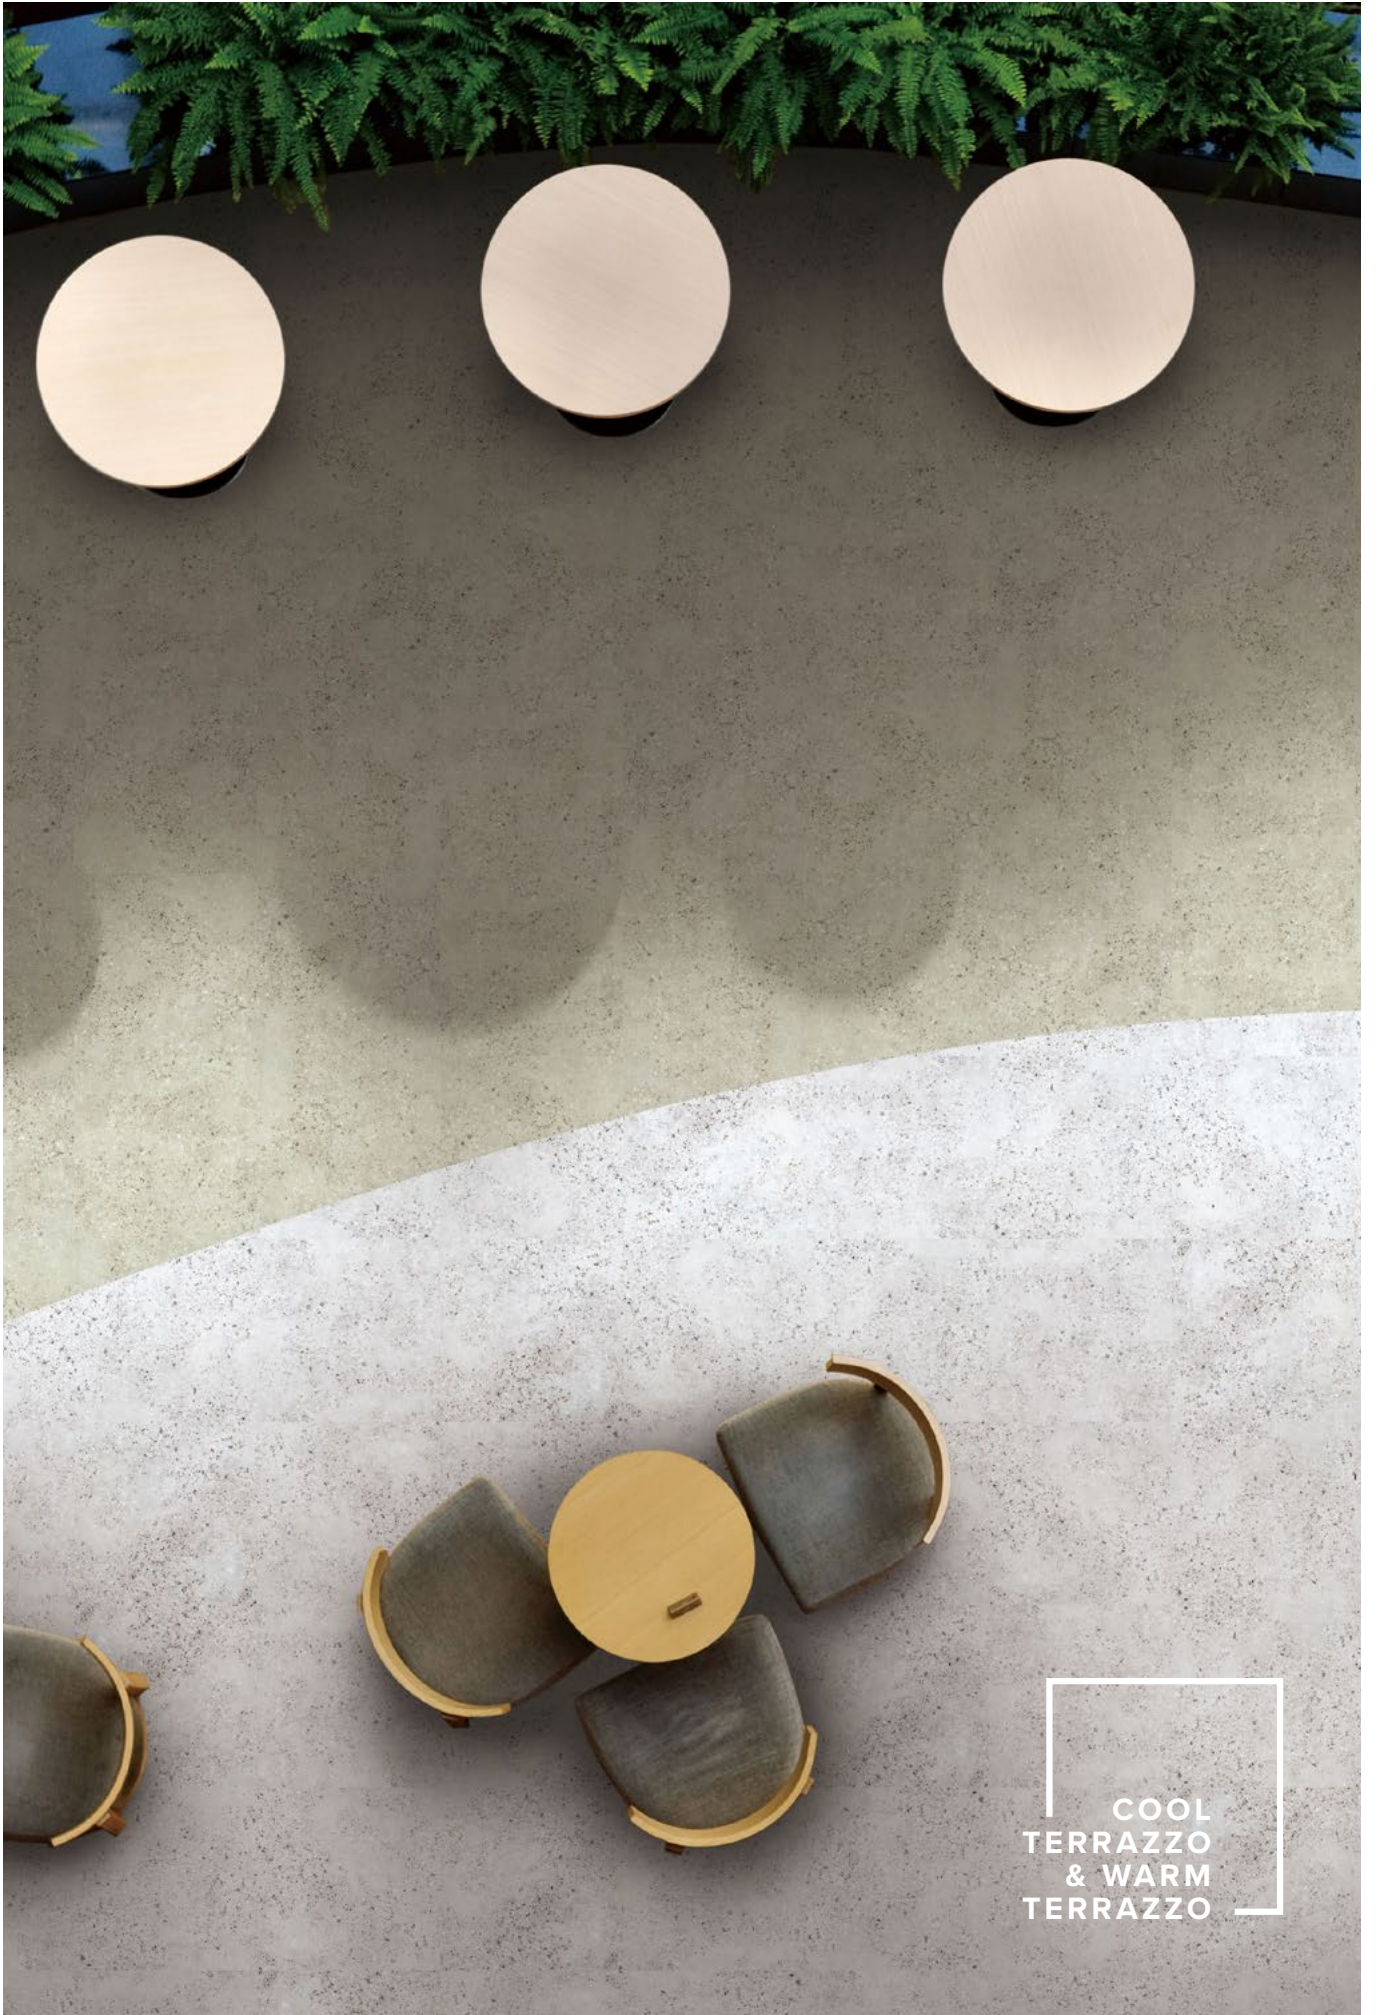

COOL  
TERRAZZO  
& WARM  
TERRAZZO






**LIGHT GREY CONCRETE** 600x600




**WARM GREY CONCRETE** 600x600

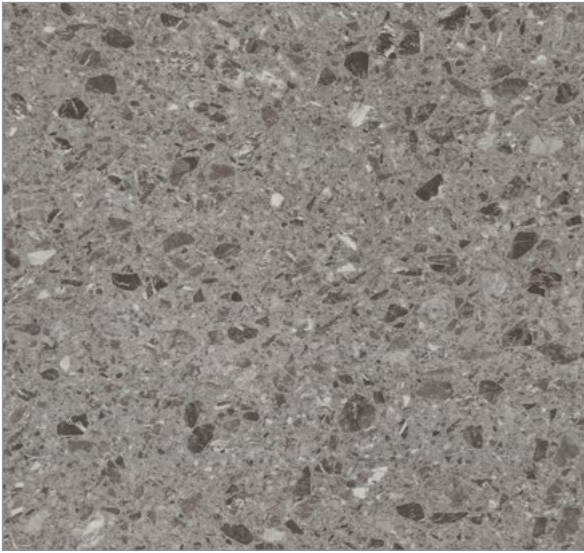

**COOL GRAVEL** 500x500



**ESTATE** 500x500

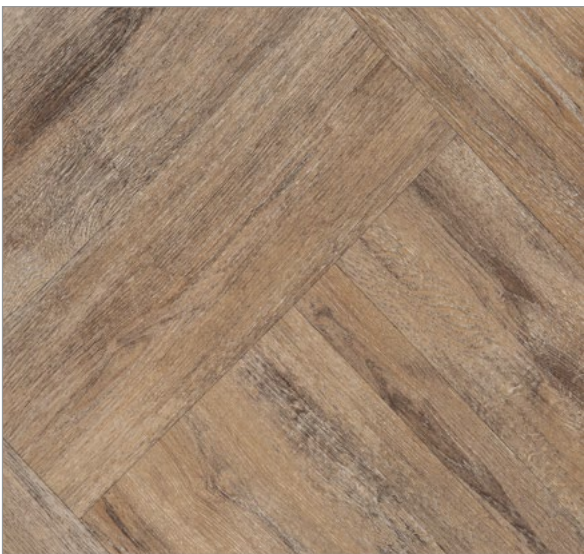

**MANOR** 500x500



**ONYX** 500x500









**COOL TERRAZZO 470x470**



**WARM TERRAZZO 470x470**

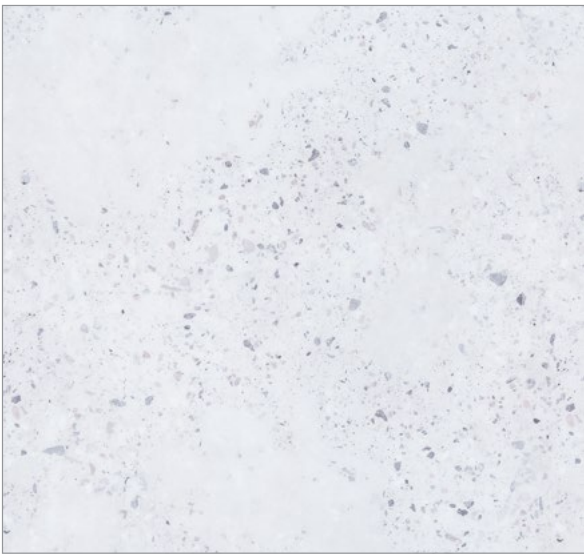

**LIGHT TERRAZZO 470x470**

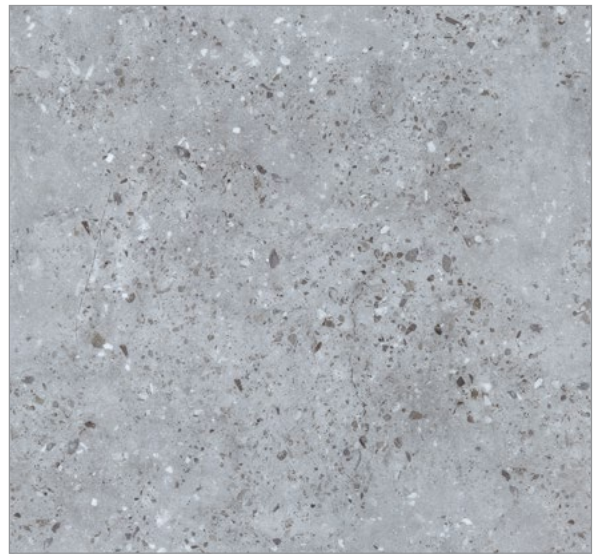

**DARK TERRAZZO 470x470**





# ALPINE ARTISAN

## DESCRIPTION

Luxury Vinyl Tiles	EN649/EN ISO 10582	–	Heterogeneous PVC
Overall Thickness	EN428/ISO 24346	mm	3.00
Wear Layer Thickness	EN429/ISO 24340	mm	0.55 (±0.05)
<b>Tile Size 1</b>	EN 427/ISO 24342	mm	470x470
Tiles/Meterage per box			15 pcs, 3.31m <sup>2</sup> /box
<b>Tile Size 2</b>	EN 427/ISO 24342	mm	500x500
Tiles/Meterage per box			13 pcs, 3.25m <sup>2</sup> /box
<b>Tile Size 3</b>	EN 427/ISO 24342	mm	600x600
Tiles/Meterage per box			9 pcs, 3.24m <sup>2</sup> /box

## CLASSIFICATION

Classification	EN685/ISO 10874	class	Commercial: 33 Industrial: 42
Fire Rating	AS ISO 9239-1	–	≥8 kW/m <sup>2</sup>
Slip Resistance	AS 4586 DIN 51130	– class	R10 R10

## PERFORMANCE

Abrasion Resistance	EN660-2	–	Group T
Dimensional Stability	EN434/ISO 23999	%	≤ 0.25%
Residual Indentation	EN433/ISO 24343:1	mm	Ave. Value ≤ 0.1mm
Electrical Resistance	EN 1815	kv	<2kv
	EN 1081	–	>10 <sup>9</sup> Ω
Colour Fastness	EN ISO - 105 - B02	degree	≥6 degree
Chemical Resistance	EN 423/ISO 26987	–	Good Resistance
Castor Wheel Test	EN 425/ISO 4918	–	Suitable

## ENVIRONMENTAL

Underfloor Heating	–	°C	Suitable - Max. 27°C
VOC Emissions	Floor Score/SCS SCS-EC10.3-2014v4.0		Indoor Airway Quality Certified Pass, Low VOC Emissions
Quality Control Management	ISO 9001:2000 ISO 14001:2004	certified certified	

Specifications are subject to manufacturing tolerances and may be changed without notice.  
Colour variation may occur between sample and supplied products due to dye lot tolerances.



Manor



Warm Terrazzo



Declare.



AIRLAY

WWW.AIRLAY.COM.AU

AIRLAY FLOORCOVERINGS

Head Office: 91-115 Link Drive, Campbellfield VIC 3061

Phone: (03) 9359 4705 Email: sales@airlay.com.au