



CARPET  
PLANKS

# METRO COLLECTION

AIRLAY   
floorcoverings



# METRO COLLECTION

The Metro Collection sets the tone for your business: savvy and strong, offering a unique and stylish look for any space. It has beautiful and timeless textures, gradients and melanges that are easy to love and will last forever.

The popular darker colours and patterns are more forgiving than solid colours. Ideal for offices, retail, schools and especially suitable for commercial environments, Metro provides flexibility, durability, high comfort and aesthetics.







UNDERGROUND










TRANSIT







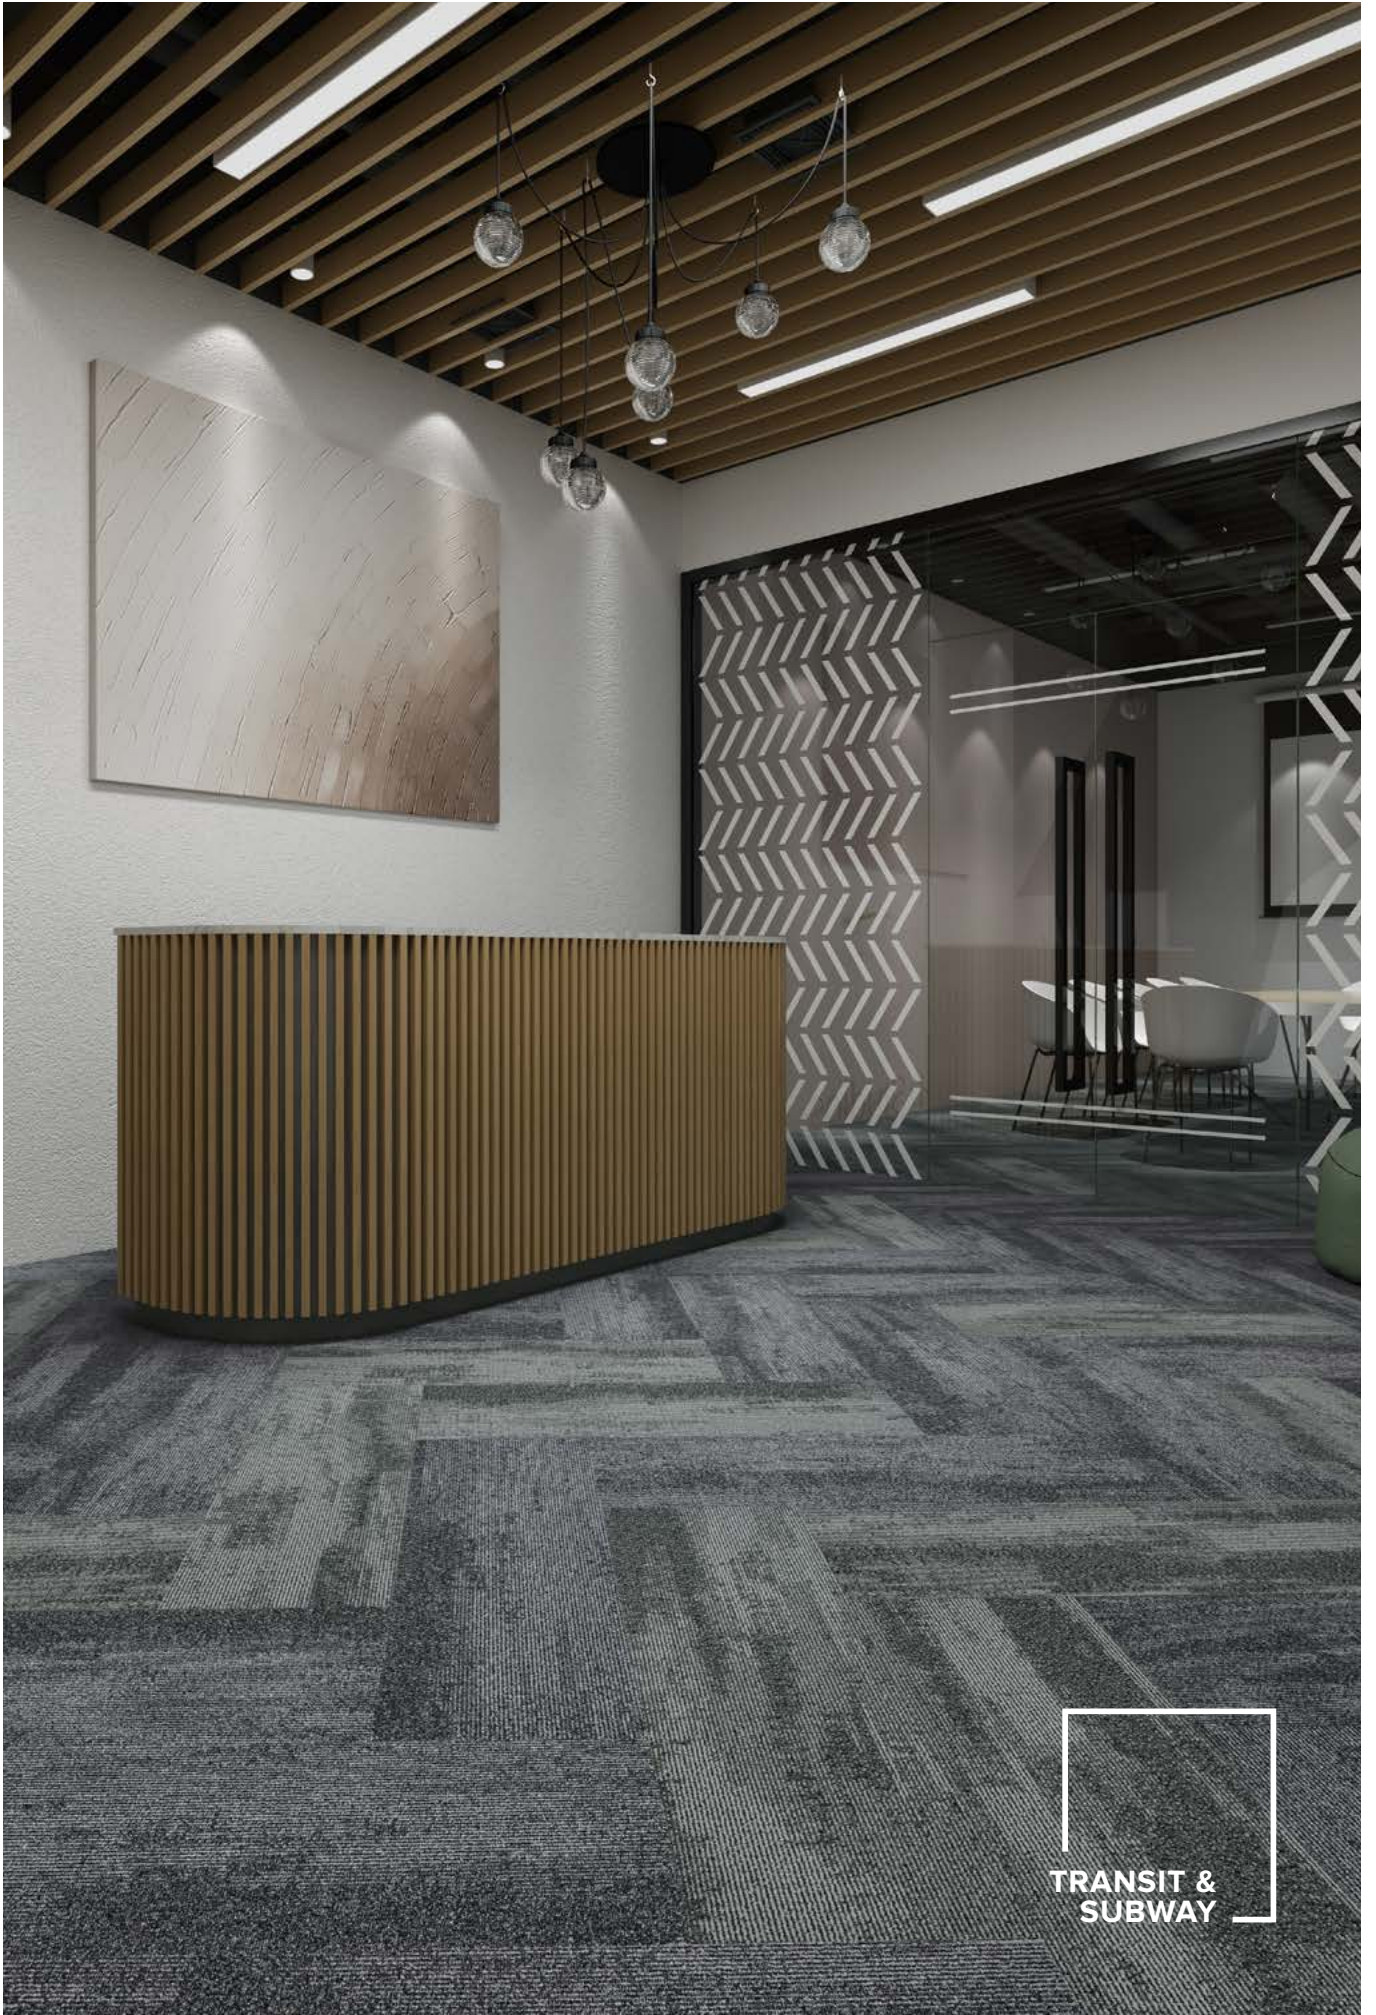

TRANSIT &  
SUBWAY











CITYSCAPE  
& TRANSIT




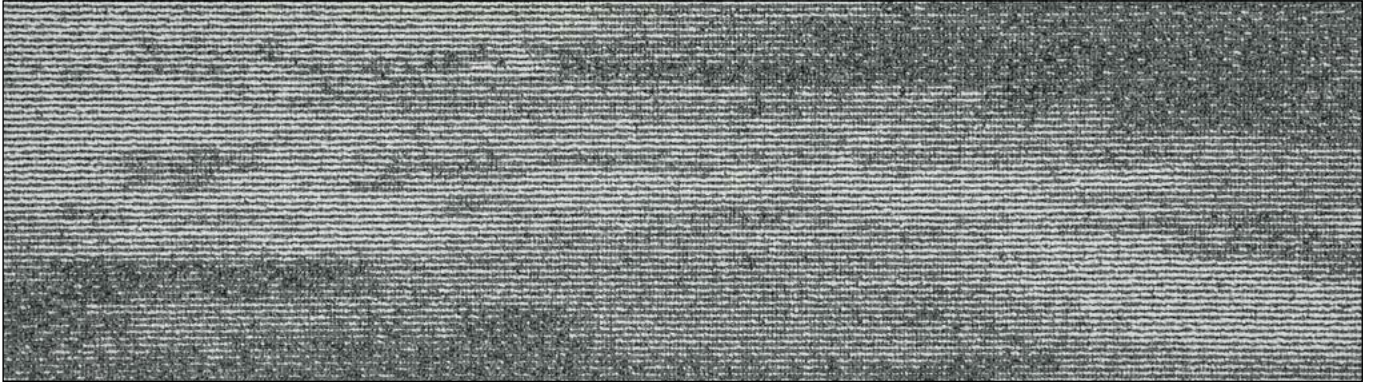

**CITYSCAPE**

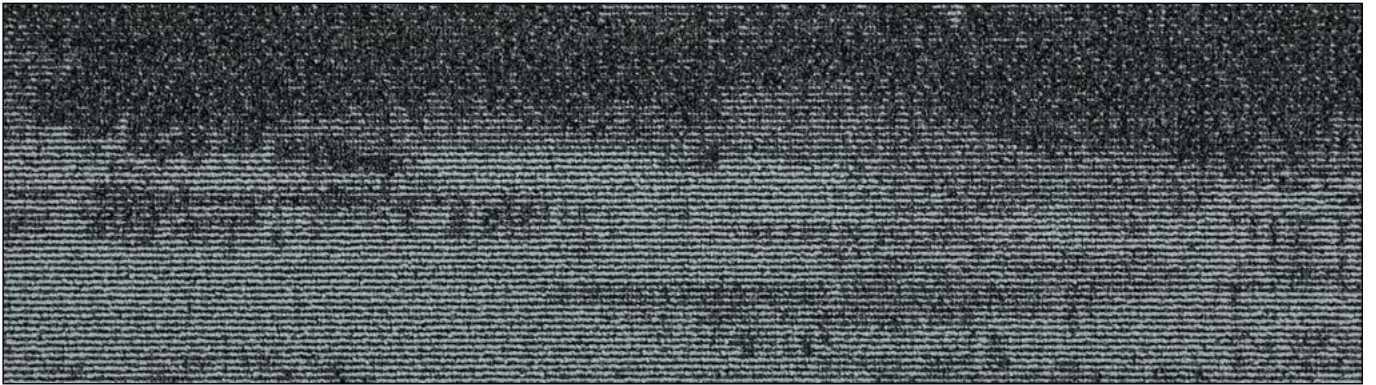

**TRANSIT**

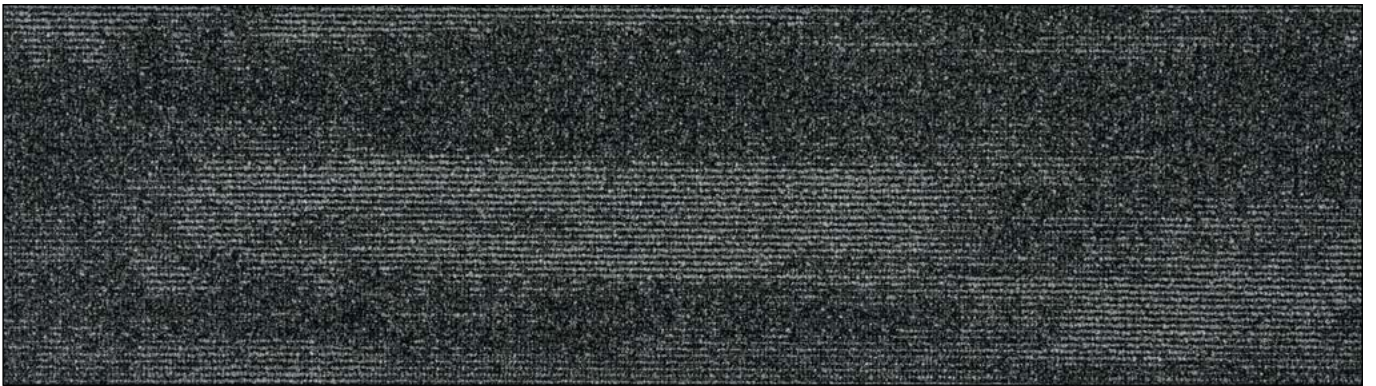

**SUBWAY**



**UNDERGROUND**



# METRO

## TECHNICAL SPECIFICATIONS

Flooring Type	Multi-Level Loop Pile Carpet Planks
Yarn / Fibre	100% Solution Dyed Nylon
Machine Gauge	1/12th
Pile Height	3.0mm +/-0.5mm
Overall Thickness	PVC: 5.0mm +/-0.5mm / Cushion: 8.0mm +/-0.5mm
Plank Size	25cm x 100cm
Backing Structure	PVC with Recycled Content / PET Cushion
Installation Method	Herringbone, Ashlar, Brick

## SUSTAINABILITY SPECIFICATIONS

Less Waste	Modular carpet creates 85 – 90% less waste than broadloom carpet
Product Stewardship	100% take back & repurpose through accredited partner
Recycled Content	Minimum of 55% recycled content in the backing structure Average of 40% recycled content by weight of product
Accreditation	Carpet Institute of Australia ECS4 Carpet & Rug Institute Green Plus (CRI Green Plus) EU CE Accreditation ISO14001:2004 Environment Certification System ISO9001:2008 Quality System Certificate

## PERFORMANCE SPECIFICATIONS

Classification (use area)	Commercial
Dimensional Stability	Less than 0.2% variation
Biocontaminant Control	Ultra Fresh Anti-microbial treated
Anti-Static	AATCC134 < 3500 Volts
Warranty	To be installed according to Australian Standards AS/NZS 2455.1:2007 and AS/NZS 2455.2:2007. 15 year warranty: <ul style="list-style-type: none"><li>• Manufacturing defect</li><li>• Dimensional stability</li><li>• Electrostatic propensity</li></ul>

Specifications are subject to manufacturing tolerances and may be changed without notice.  
Colour variation may occur between sample and supplied products due to dye lot tolerances.

