



CARPET  
TILES

# COMO COLLECTION

AIRLAY 



# COMO COLLECTION

The Como carpet tile collection features a timeless and elegant design and is made from solution dyed nylon fibre with a multi loop construction.

It is available in 7 prestigious colourways and delivers an ideal patterned carpeting solution for multiple commercial environments. Como Carpet tiles are also available on recycled cushion backing for increased underfoot comfort and superior acoustic benefits.








HAMPTON



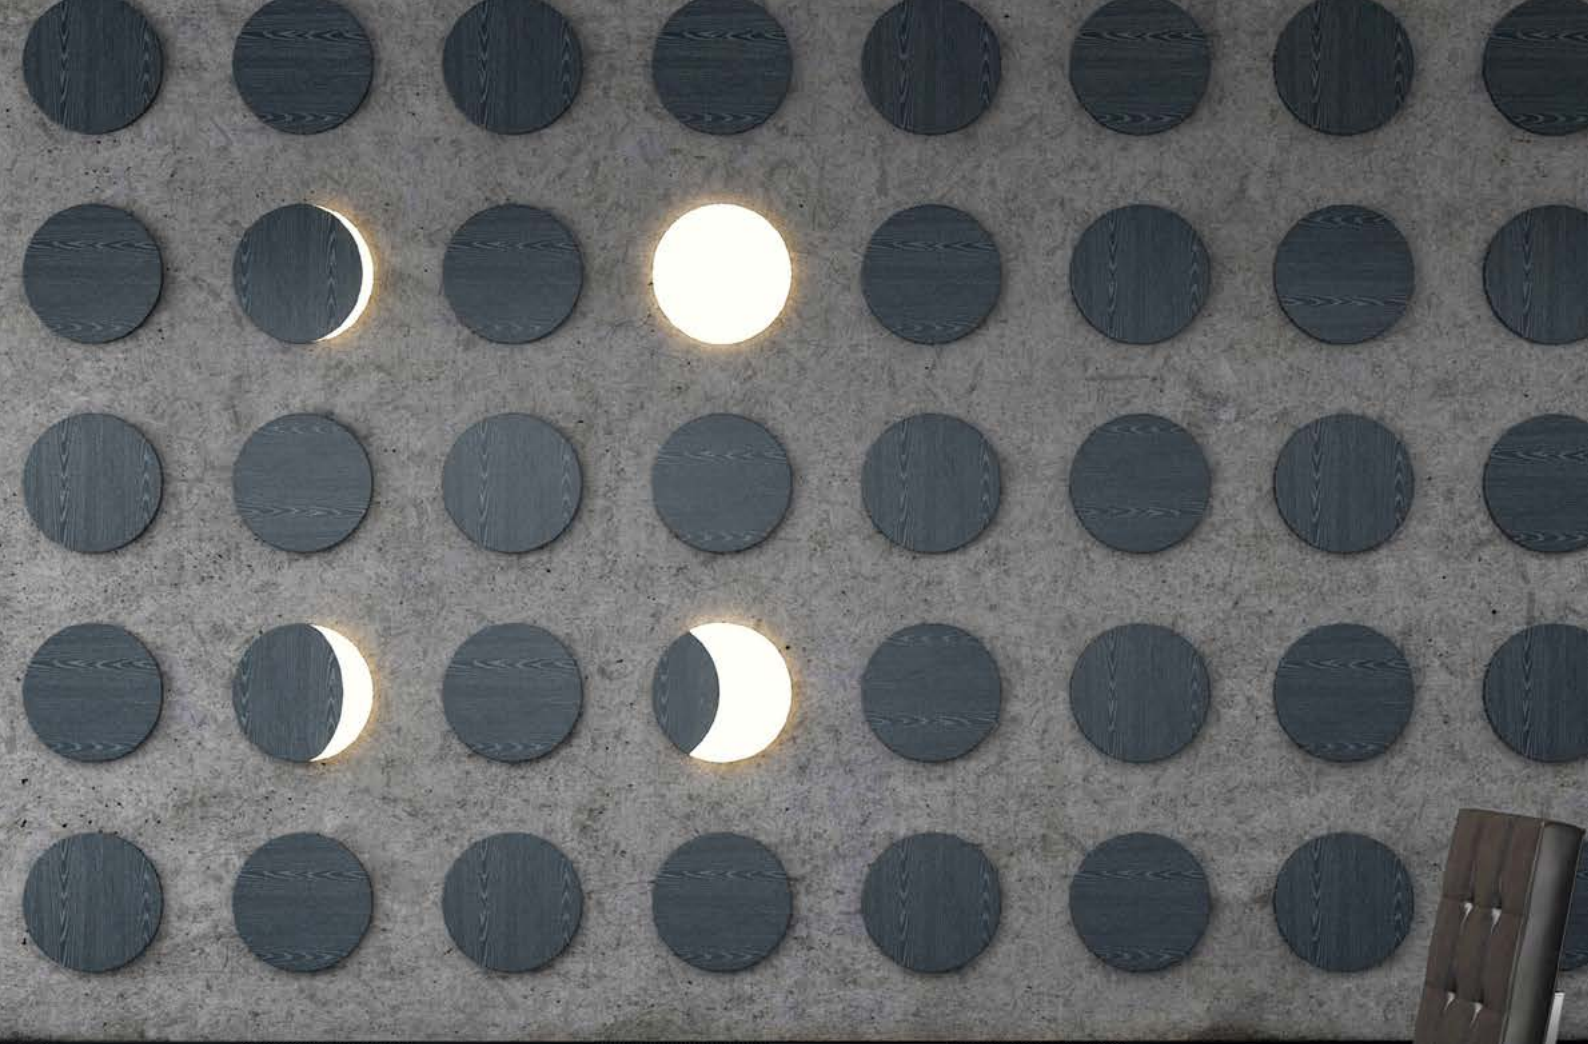

  
WINDSOR






TOORAK





BRIGHTON



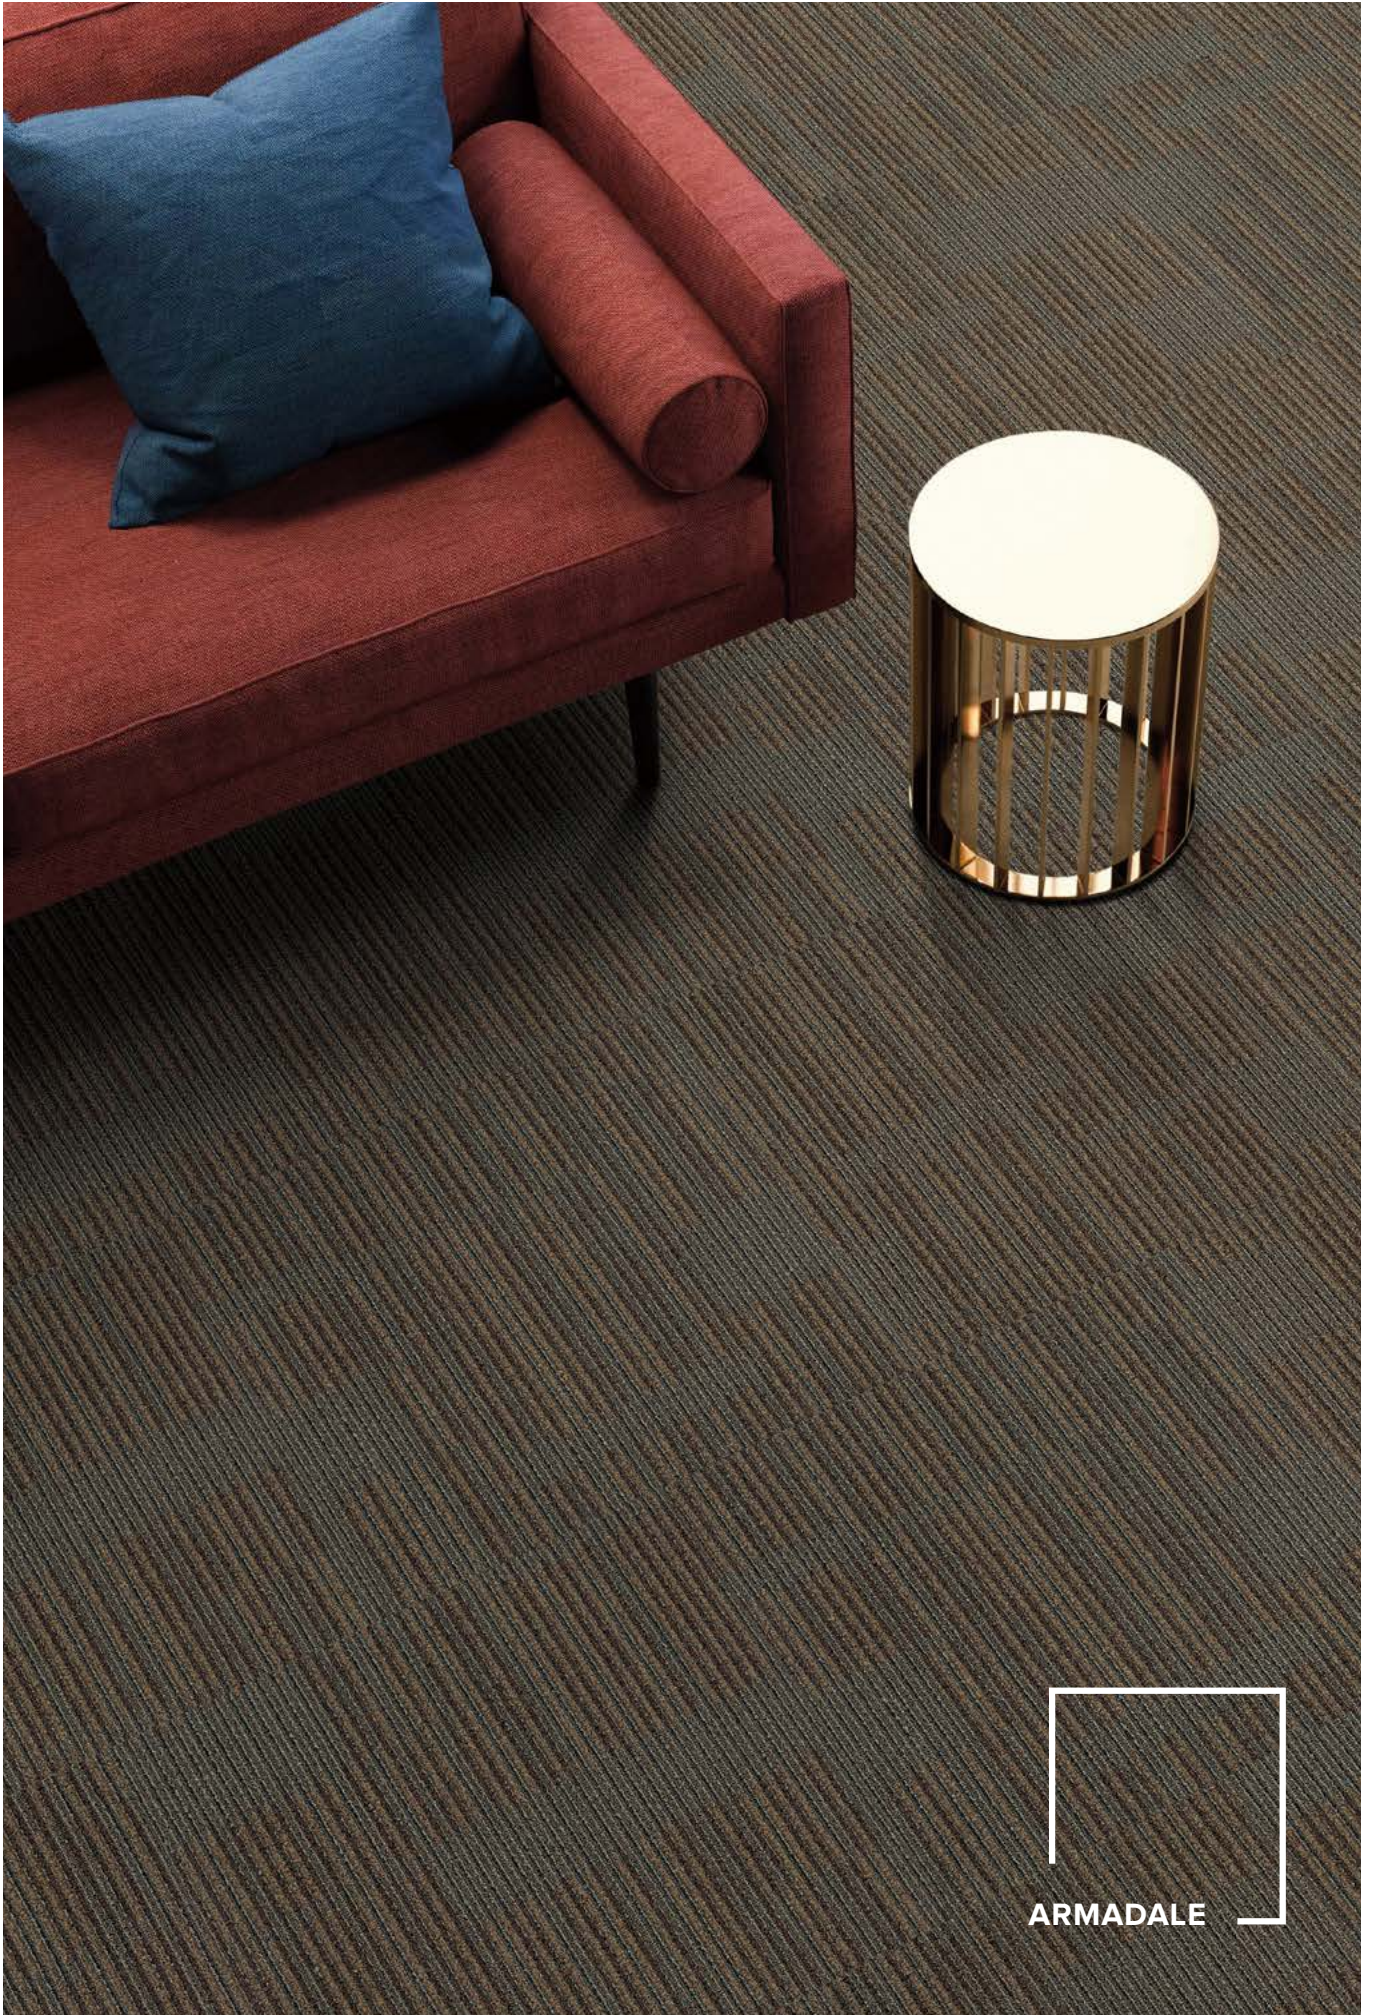


ARMADALE





TOORAK &  
BRIGHTON




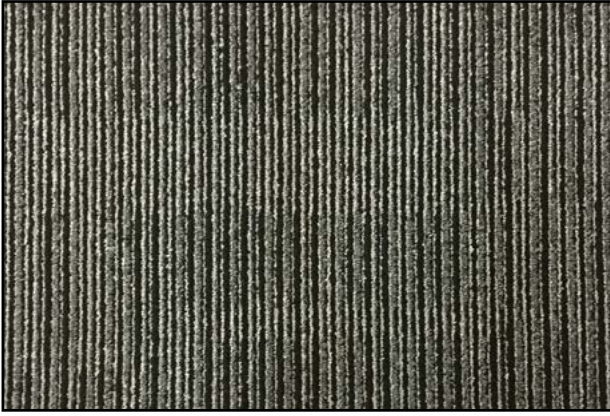

**SURREY HILLS**




**TOORAK**

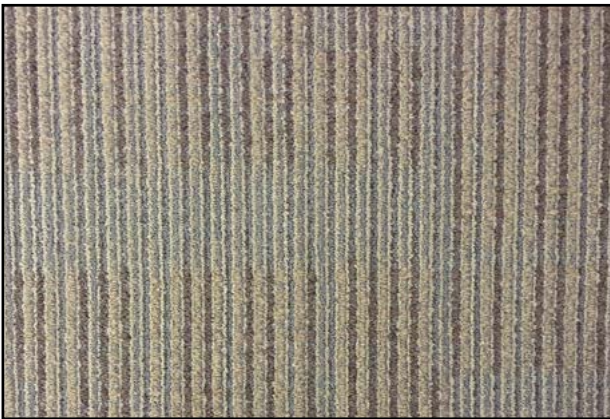


**ARMADALE**




**CANTERBURY**

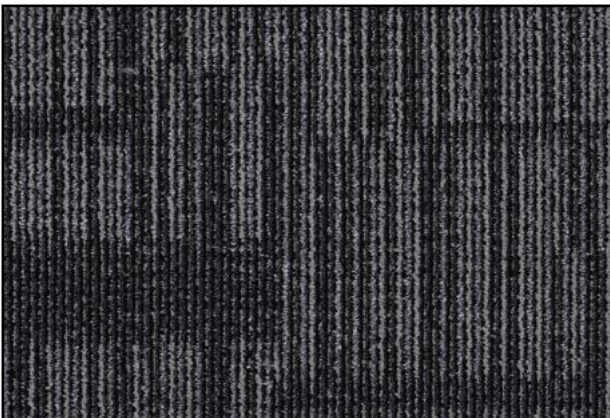

**HAMPTON**

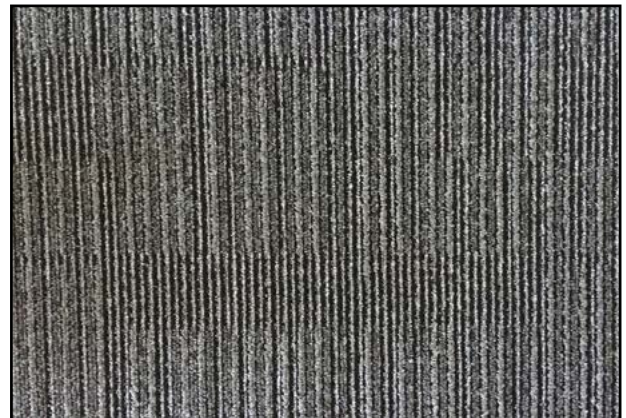

**BRIGHTON**

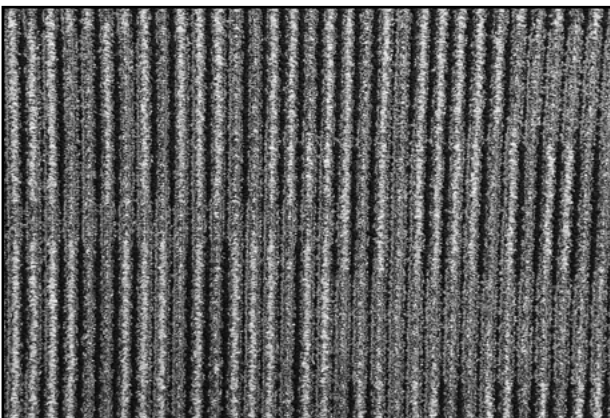

**WINDSOR**





# COMO



Armada



Surrey Hills



Hampton

## TECHNICAL SPECIFICATIONS


<b>Product Range</b>	Como
<b>Product Description</b>	Tufted Multi-Level Loop Carpet Tile
<b>Yarn / Fibre</b>	100% Solution Dyed Nylon
<b>Machine Gauge</b>	1/12th
<b>Pile Height</b>	3.0mm +/-0.5mm
<b>Total Thickness</b>	7.0mm +/-0.5mm
<b>Tile Size</b>	50cm x 50cm
<b>Backing Structure</b>	PVC with Recycled Content or Cushion Back
<b>Installation Method</b>	Quarter Turn, Ashlar, Brick

## SUSTAINABILITY SPECIFICATIONS

<b>Less Waste</b>	Modular carpet creates 85 – 90% less waste than broadloom carpet
<b>Product Stewardship</b>	100% take back & repurpose through accredited partner
<b>Recycled Content</b>	Minimum of 55% recycled content in the backing structure  Average of 40% recycled content by weight of product
<b>Accreditation</b>	Carpet Institute of Australia ECS4 Carpet & Rug Institute Green Plus (CRI Green Plus) EU CE Accreditation ISO14001:2004 Environment Certification System ISO9001:2008 Quality System Certificate

## PERFORMANCE SPECIFICATIONS

<b>Area of Use</b>	Commercial
<b>Dimensional Stability</b>	Less than 0.2% variation
<b>Biocontaminant Control</b>	Ultra Fresh Anti-microbial treated
<b>Anti-Static</b>	AATCC134 < 3000 Volts
<b>Warranty</b>	To be installed according to Australian Standards AS/NZS 2455.1:2007 and AS/NZS 2455.2:2007.  15 year limited warranty: • Manufacturing defect • Dimensional stability • Electrostatic propensity



Specifications are subject to manufacturing tolerances and may be changed without notice. Colour variation may occur between sample and supplied products due to dye lot tolerances.