



CARPET
TILES

CORPORATE COLLECTION

AIRLAY 

CORPORATE COLLECTION

The Corporate carpet tile collection is an eclectic mix of popular office friendly designs. Made from 100% solution dyed nylon, with a tufted textured loop pile, the carpet tiles not only offer complete consistency in colour, they also provide superior stain resistance and extra durability.


Performing extremely well in high traffic environments, this collection will maintain its beauty for years to come.






MUTUAL



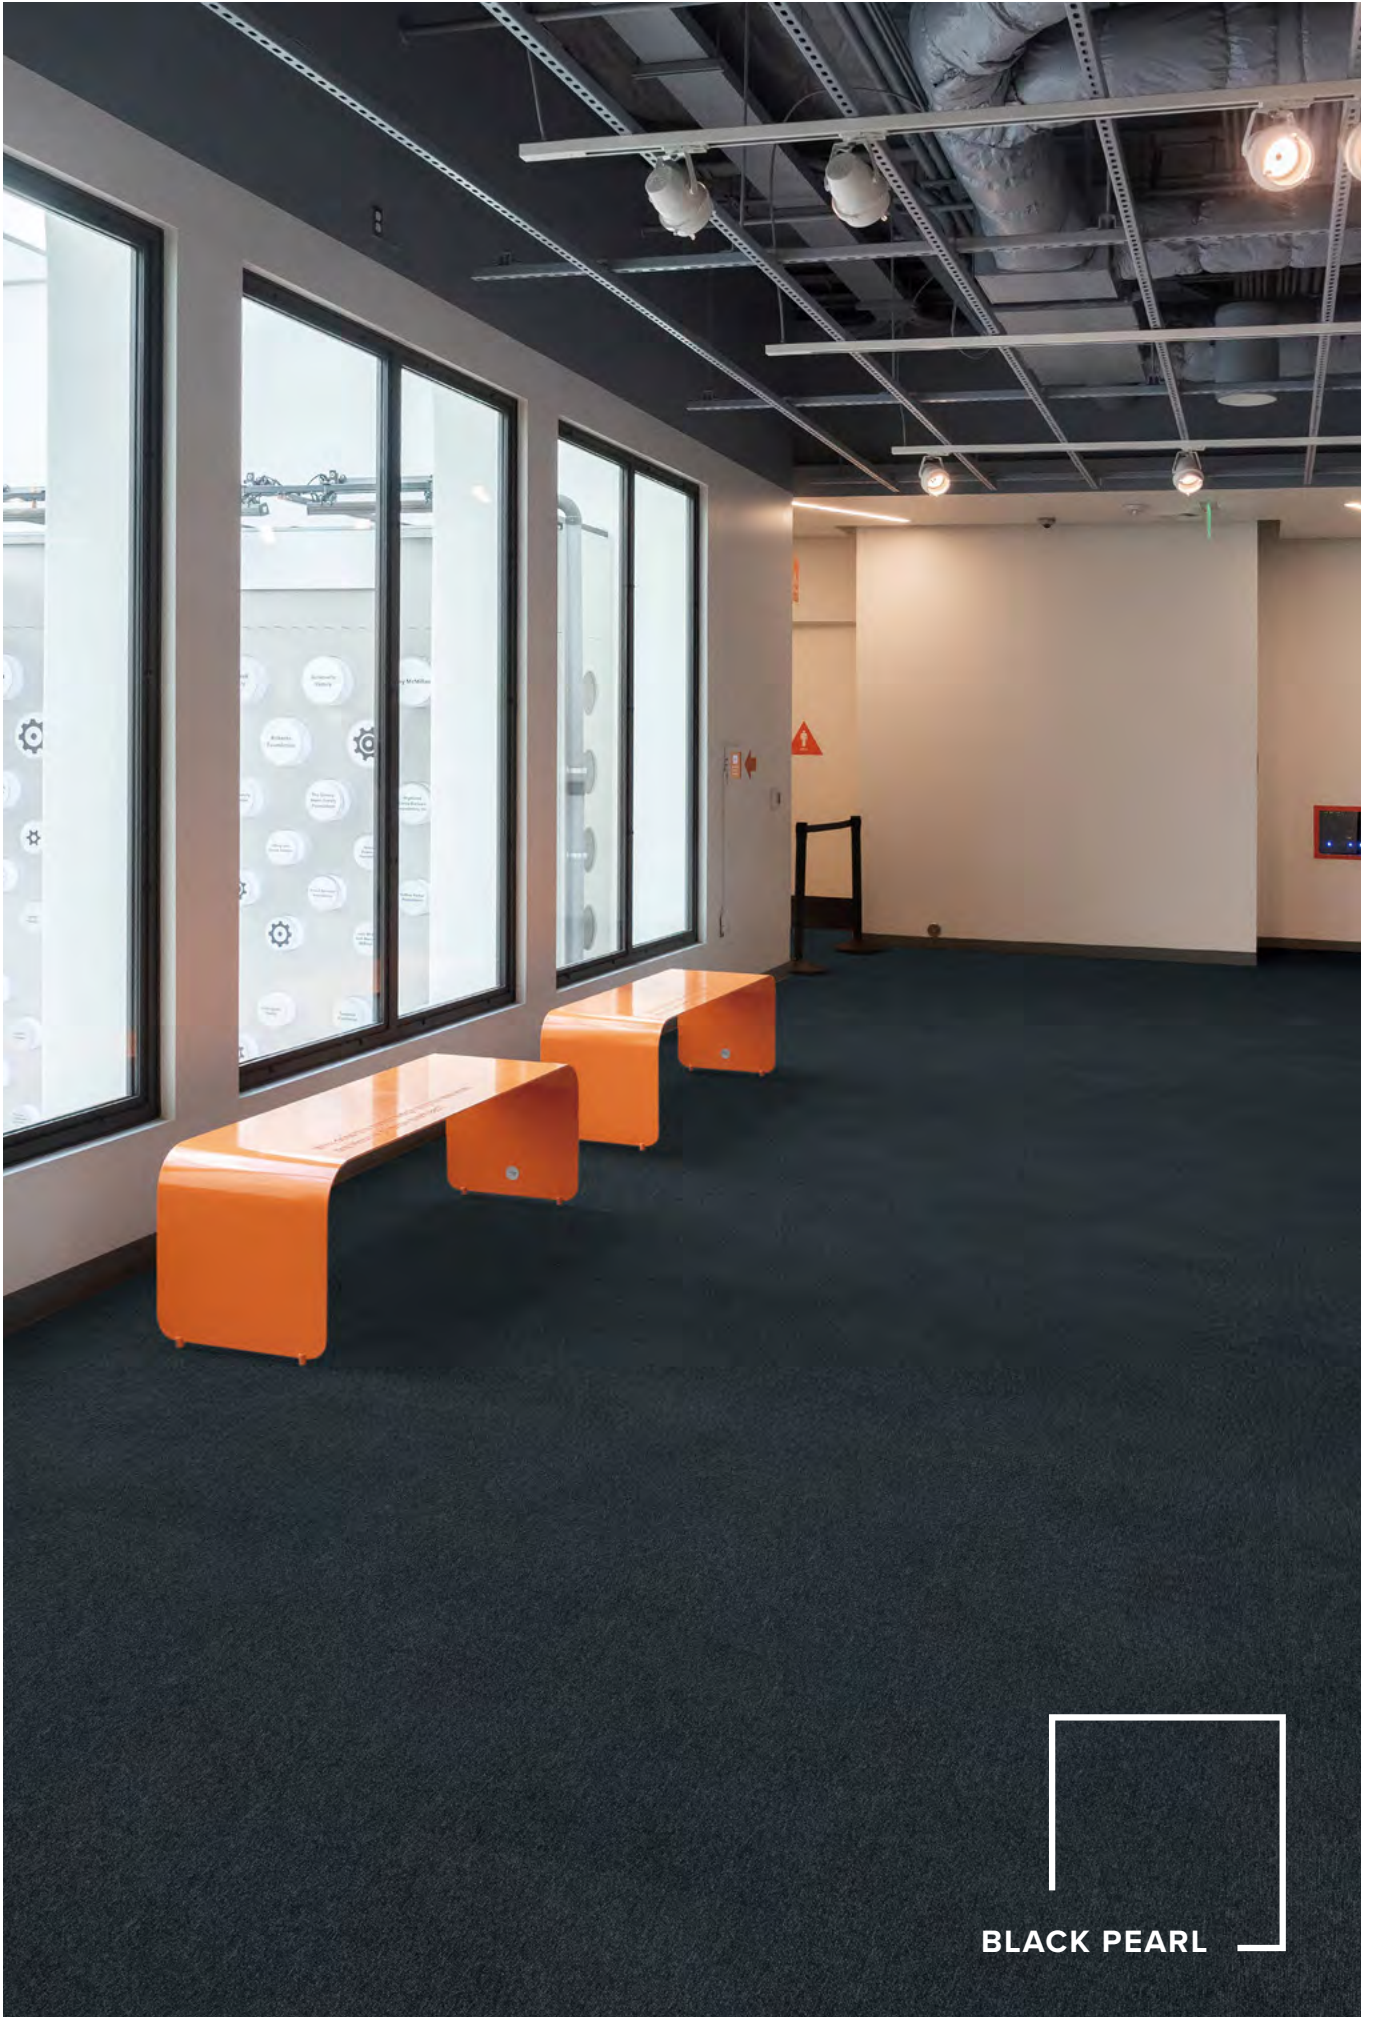

BLACK PEARL



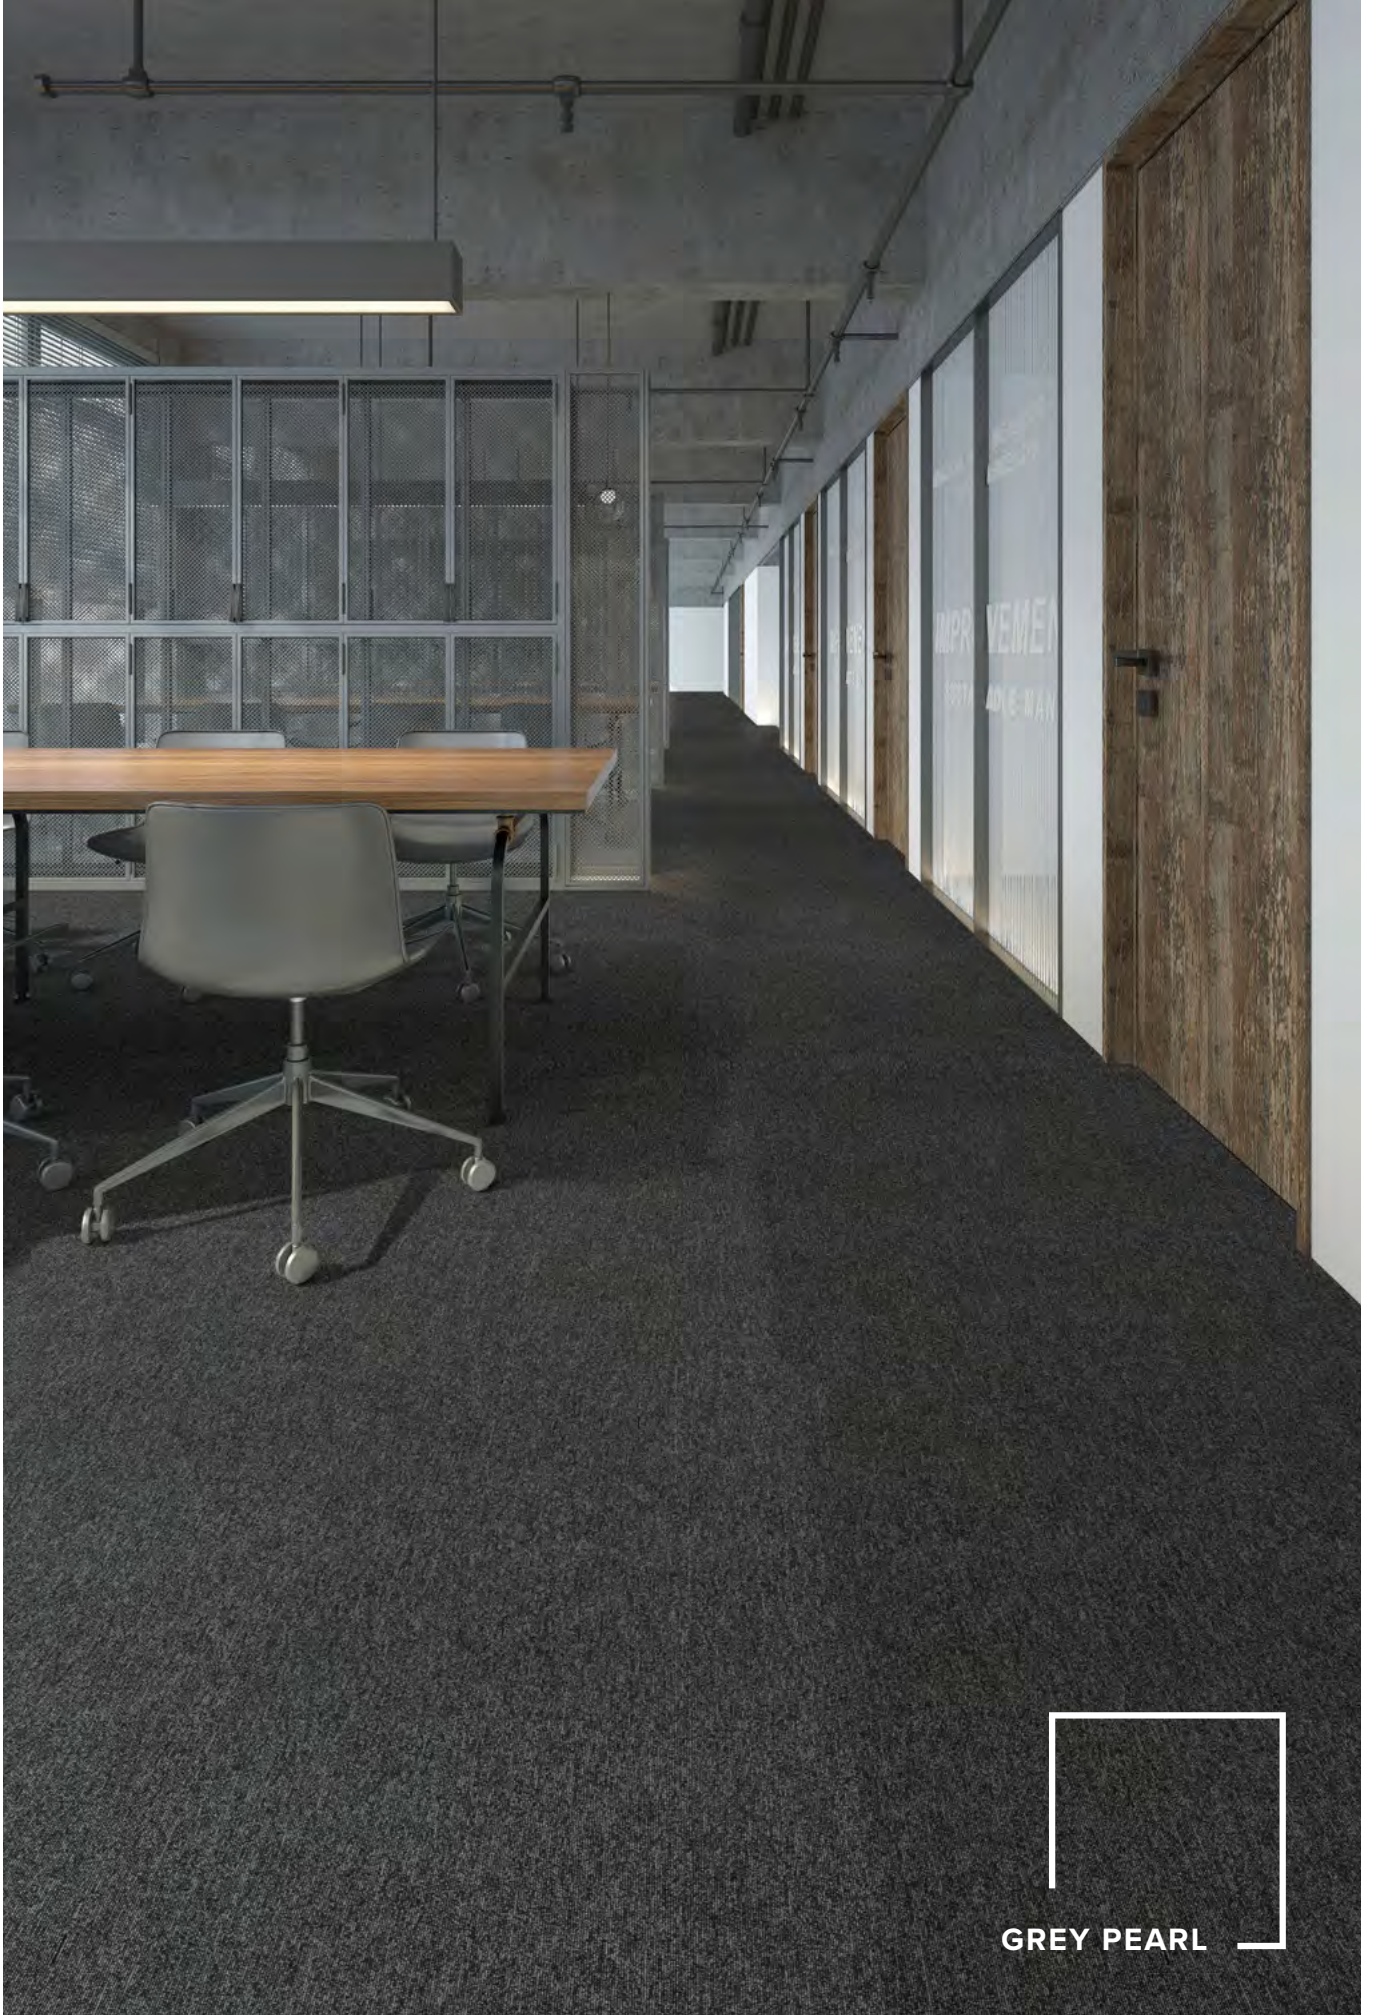


GREY PEARL






MAJESTIC
& MUTUAL



IMPERIAL &
BLACK PEARL

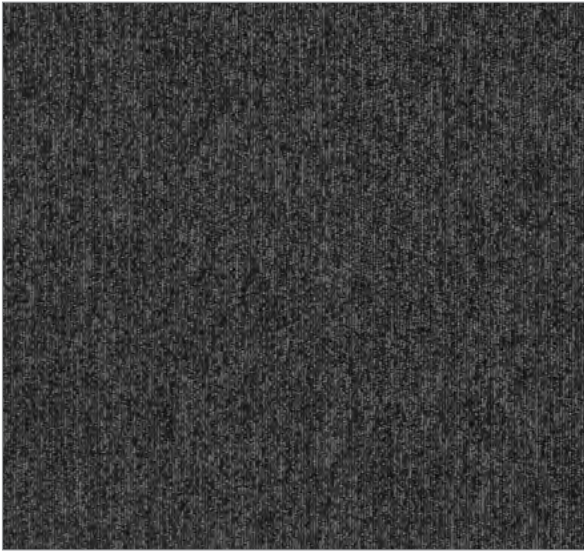

GREY PEARL




MUTUAL




GRAPHITE



DYNASTY

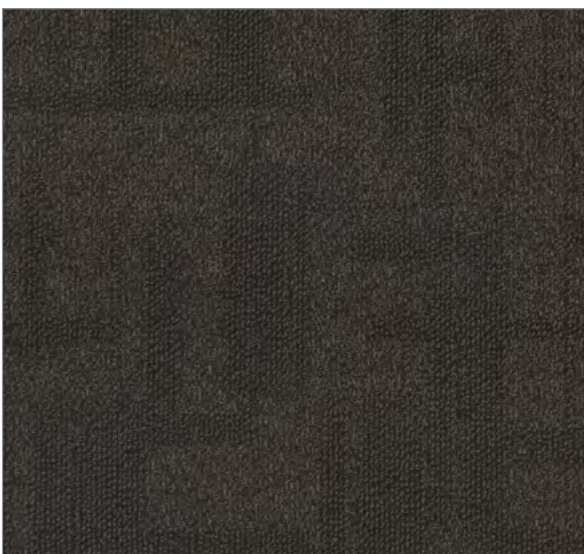


PASSION

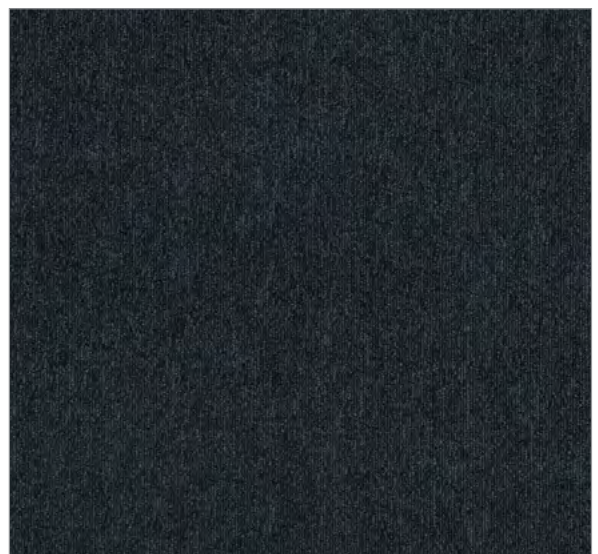


BLACK PEARL




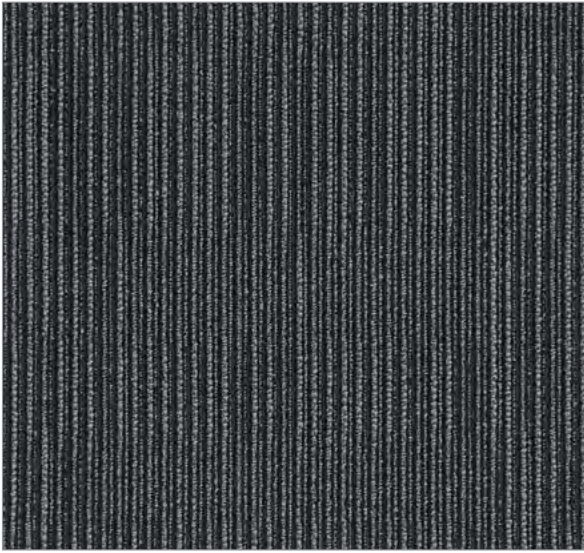

IMPERIAL

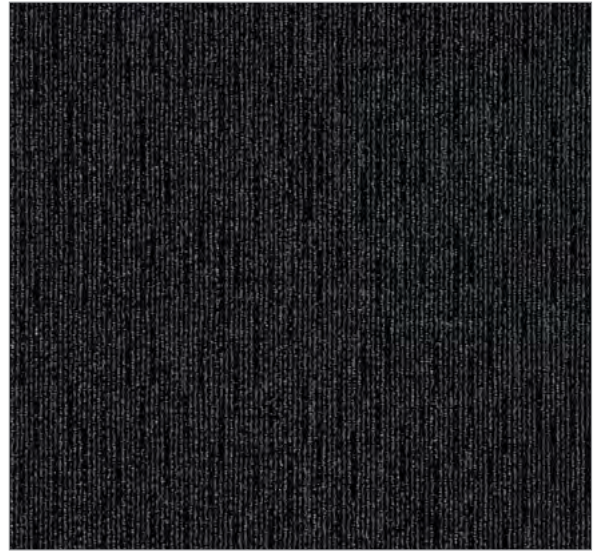

MAJESTIC

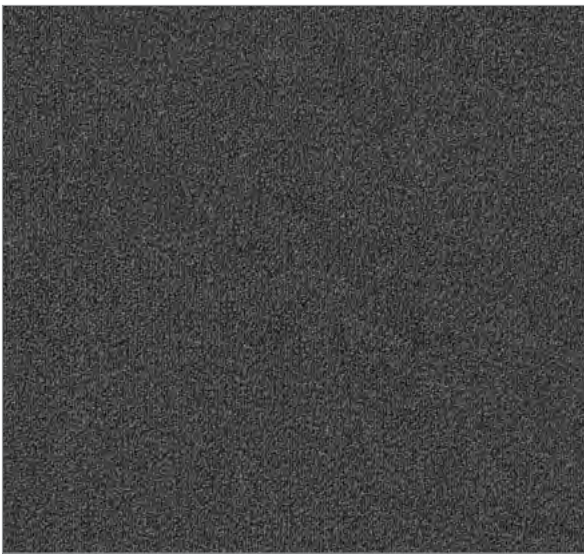


ZERO – WALK OFF MAT 22502



IRON (PLANKS)




CORPORATE

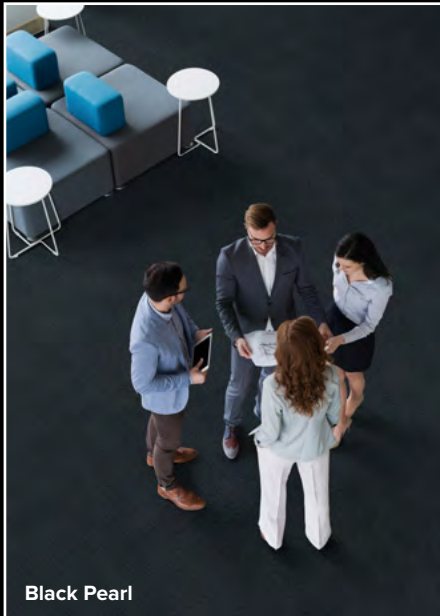

Black Pearl



Passion

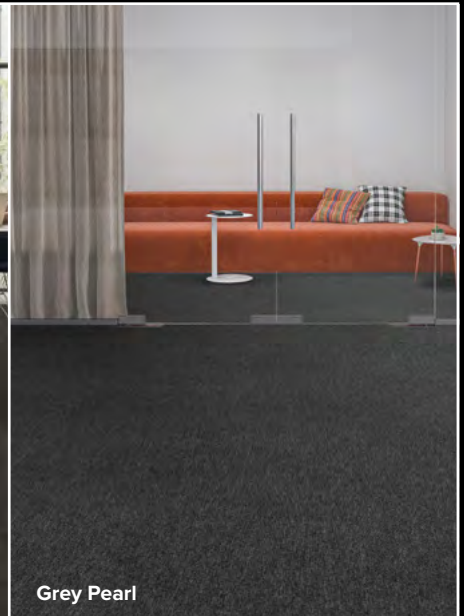

Grey Pearl

TECHNICAL SPECIFICATIONS


| | |
|----------------------------|----------------------------------|
| Product Range | Corporate |
| Product Description | Tufted Textured Loop Carpet Tile |
| Yarn / Fibre | 100% Solution Dyed Nylon |
| Machine Gauge | 1/10th & 1/12th |
| Pile Height | 3.5mm +/-0.5mm |
| Total Thickness | 6.5mm +/-0.5mm |
| Tile Size | 50cm x 50cm |
| Backing Structure | PVC with Recycled Content |
| Installation Method | Quarter Turn, Ashlar, Brick |

SUSTAINABILITY SPECIFICATIONS

| | |
|----------------------------|--|
| Less Waste | Modular carpet creates 85 – 90% less waste than broadloom carpet |
| Product Stewardship | 100% take back & repurpose through accredited partner |
| Recycled Content | Minimum of 55% recycled content in the backing structure Average of 40% recycled content by weight of product |
| Accreditation | Carpet & Rug Institute Green Plus (CRI Green Plus) EU CE Accreditation ISO14001:2004 Environment Certification System ISO9001:2008 Quality System Certificate |

PERFORMANCE SPECIFICATIONS

| | |
|-------------------------------|--|
| Area of Use | Commercial |
| Dimensional Stability | Less than 0.2% variation |
| Biocontaminant Control | Ultra Fresh Anti-microbial treated |
| Anti-Static | AATCC134 < 3500 Volts |
| Warranty | To be installed according to Australian Standards AS/NZS 2455.1:2007 and AS/NZS 2455.2:2007. 15 year limited warranty: • Manufacturing defect • Dimensional stability • Electrostatic propensity |



Specifications are subject to manufacturing tolerances and may be changed without notice. Colour variation may occur between sample and supplied products due to dye lot tolerances.



AIRLAY FLOORCOVERINGS

Head Office: 91-115 Link Drive, Campbellfield VIC 3061

Phone: (03) 9359 4705 **Email:** sales@airlay.com.au

AIRLAY.COM.AU