

MYSTIQUE

TECHNICAL SPECIFICATIONS

Flooring Type	Multi-Level Loop Pile Carpet Tile
Yarn / Fibre	100% Solution Dyed Nylon
Machine Gauge	1/12th
Pile Height	4.0mm +/-0.5mm
Overall Thickness	PVC: 6.0mm +/-0.5mm / Cushion: 8.5mm +/-0.5mm
Plank Size	50cm x 50cm
Backing Structure	PVC Backing: Recycled Content / Cushion Backing: PET
Installation Method	Quarter Turn, Ashlar, Brick

SUSTAINABILITY SPECIFICATIONS

Less Waste	Modular carpet creates 85 – 90% less waste than broadloom carpet
Product Stewardship	100% take back & repurpose through accredited partner
Recycled Content	Minimum of 55% recycled content in the backing structure Average of 40% recycled content by weight of product
Accreditation	Carpet Institute of Australia ECS4 Carpet & Rug Institute Green Plus (CRI Green Plus) EU CE Accreditation ISO14001:2004 Environment Certification System ISO9001:2008 Quality System Certificate


PERFORMANCE SPECIFICATIONS

Classification (use area)	Commercial
Dimensional Stability	Less than 0.2% variation
Biocontaminant Control	Ultra Fresh Anti-microbial treated
Anti-Static	AATCC134 < 3500 Volts
Warranty	To be installed according to Australian Standards AS/NZS 2455:1:2019 and AS/NZS 2455.2:2019. 15 year warranty: <ul style="list-style-type: none"> • Manufacturing defect • Dimensional stability • Electrostatic propensity

Specifications are subject to manufacturing tolerances and may be changed without notice.
Colour variation may occur between sample and supplied products due to dye lot tolerances.



Silver Eclipse + Shadow Mist

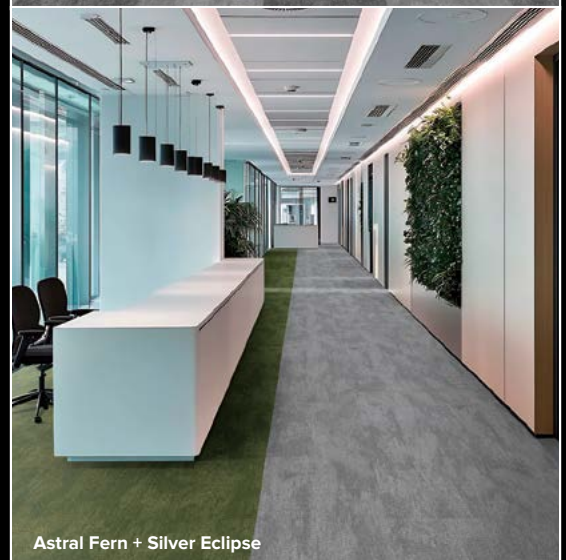

Astral Fern + Silver Eclipse

