


SIERRA

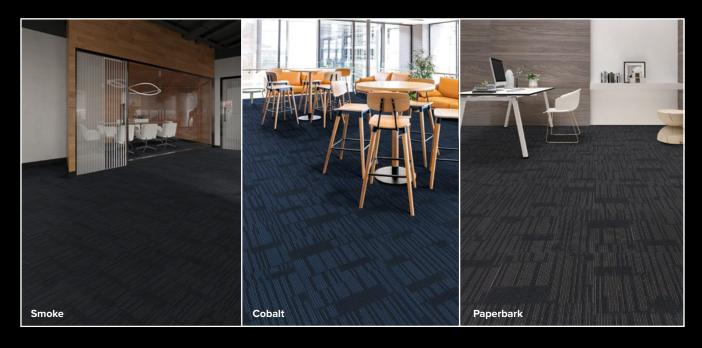

TECHNICAL SPECIFICATIONS

Product Range Sierra

Product Description Tufted Multi-Level Loop Carpet Tile

Yarn / Fibre 100% Solution Dyed Nylon

Machine Gauge 1/12th

 Pile Height
 3.0mm +/-0.5mm

 Total Thickness
 7.0mm +/-0.5mm

 Tile Size
 50cm x 50cm

Backing StructurePVC with Recycled ContentInstallation MethodQuarter Turn, Ashlar, Brick

SUSTAINABILITY SPECIFICATIONS

Less Waste Modular carpet creates 85 – 90% less

waste than broadloom carpet

Product Stewardship 100% take back & repurpose through accredited partner

Recycled Content Minimum of 55% recycled content in

the backing structure

Average of 40% recycled content by

weight of product

Accreditation Carpet & Rug Institute Green Plus

(CRI Green Plus)

EU CE Accreditation

ISO14001:2004 Environment Certification System ISO9001:2008 Quality System Certificate

PERFORMANCE SPECIFICATIONS

Area of Use Commercial

Dimensional Stability Less than 0.2% variation

Biocontaminant Control Ultra Fresh Anti-microbial treated

Anti-Static AATCC134 < 3000 Volts

Warranty To be installed according to Australian Standards

AS/NZS 2455:1:2007 and AS/NZS 2455.2:2007. 15 year limited warranty: • Manufacturing defect

Manufacturing defect

• Dimensional stability

• Electrostatic propensity











Specifications are subject to manufacturing tolerances and may be changed without notice. Colour variation may occur between sample and supplied products due to dye lot tolerances.



Head Office: 91-115 Link Drive, Campbellfield VIC 3061 **Phone:** (03) 9359 4705 **Email:** sales@airlay.com.au