



SHEET
VINYL

AQUASAFE COLLECTION

BAREFOOT SAFETY FLOORING

AQUASAFE COLLECTION

AquaSafe has been specially engineered to provide superior slip resistance in wet environments, such as bathrooms and showers. Its durable design helps minimize the risk of slipping, especially in barefoot areas. The reinforced surface not only offers excellent protection against stains but also simplifies maintenance, ensuring long-lasting safety and reliability.

Suitable for wet rooms, walk-in showers, and changing rooms, as well as other commercial and residential environments where the risk of spillage or exposure to contaminants is present.



STORM GREY-
CHIP



STONE TAUPE
CHIP




FOG GREY
CHIP



SANDY BEIGE
CHIP




STORM GREY
CHIP

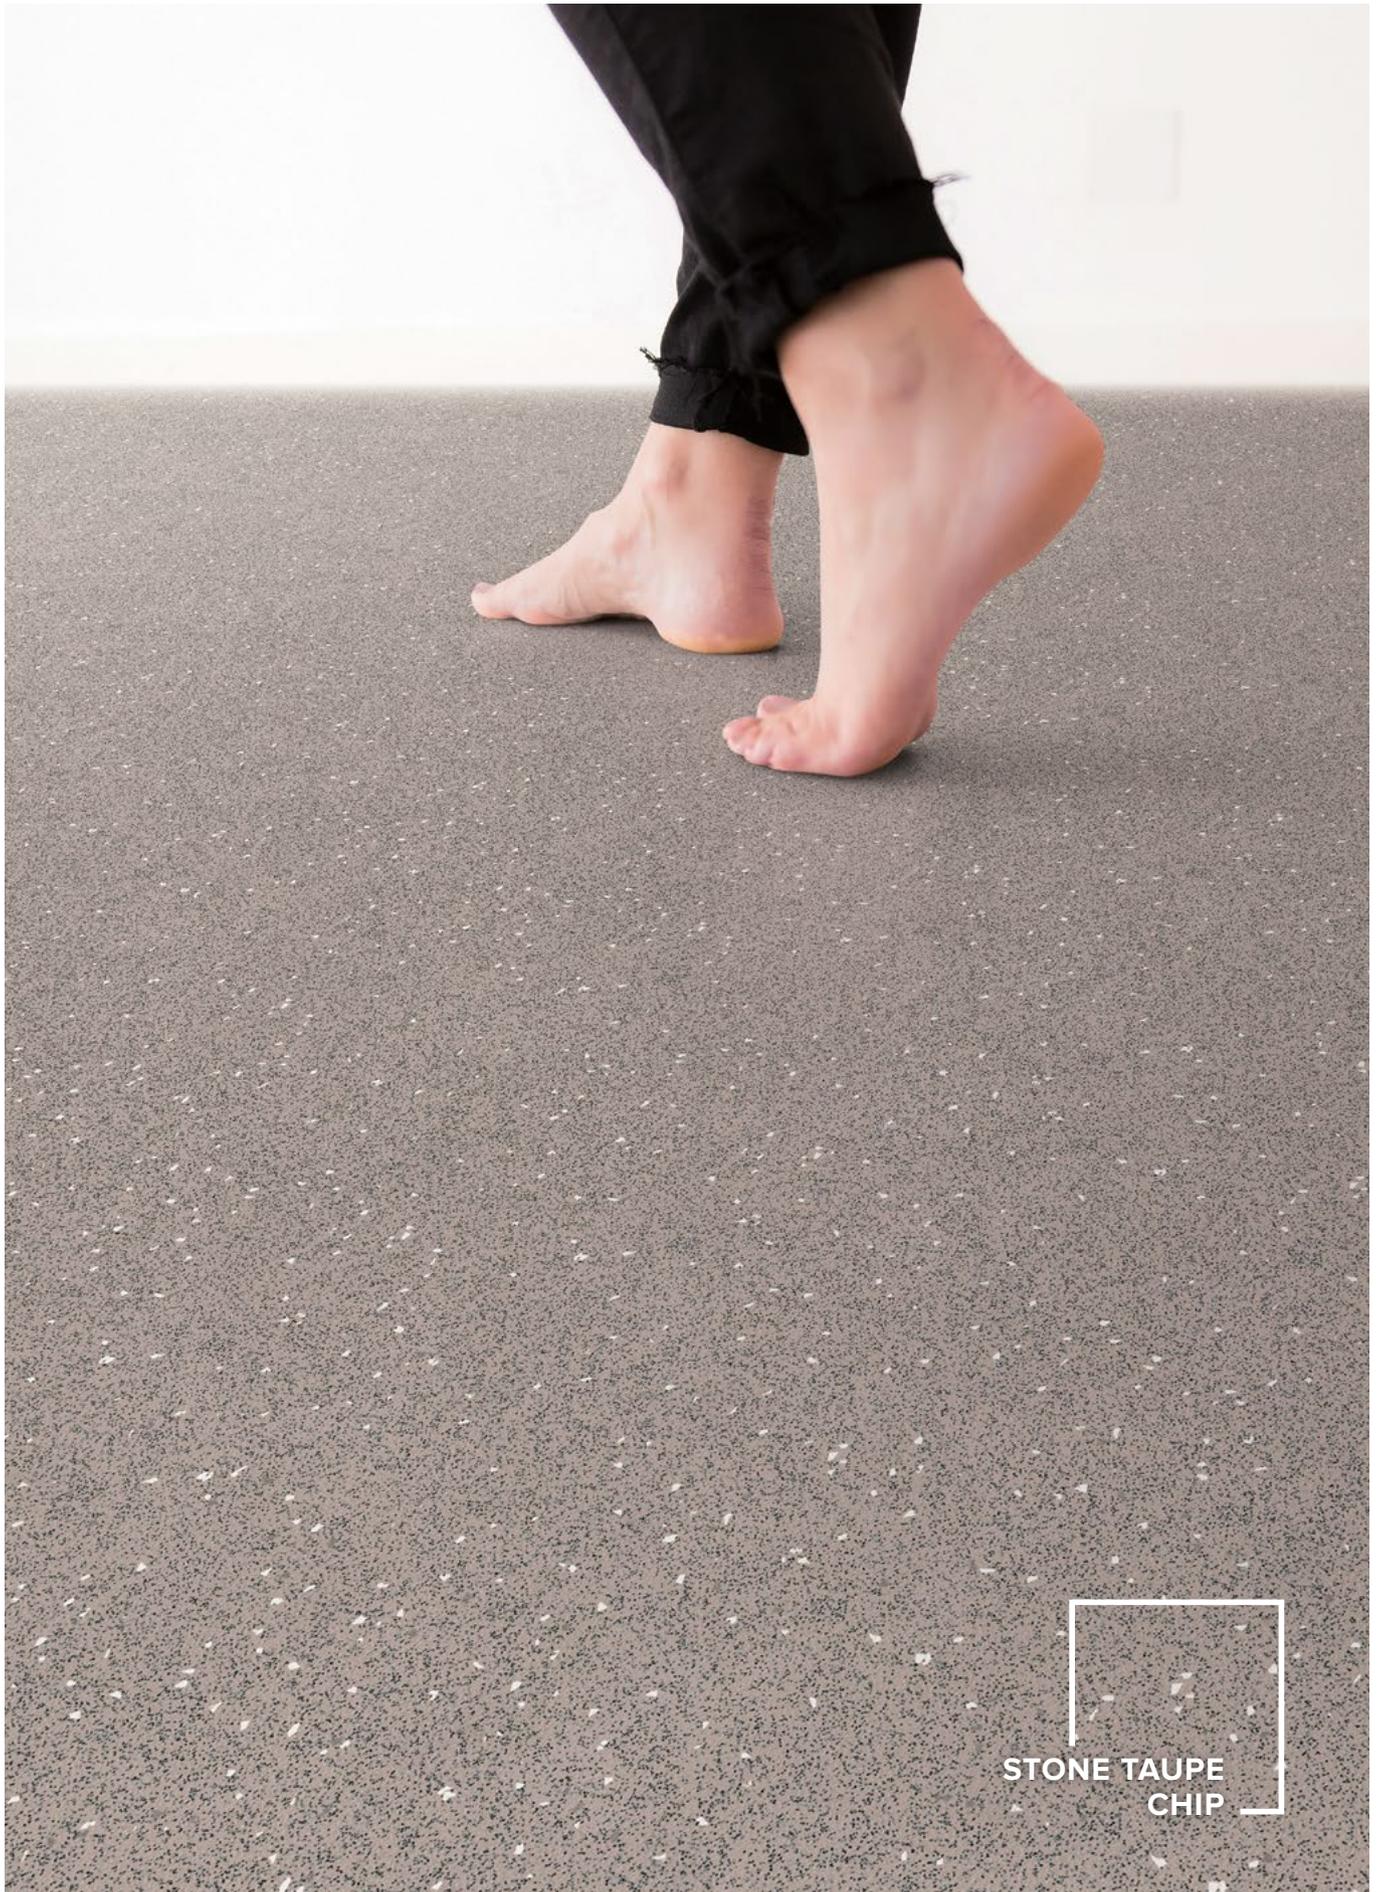

STONE TAUPE
CHIP



SANDYBEIGE
CHIP

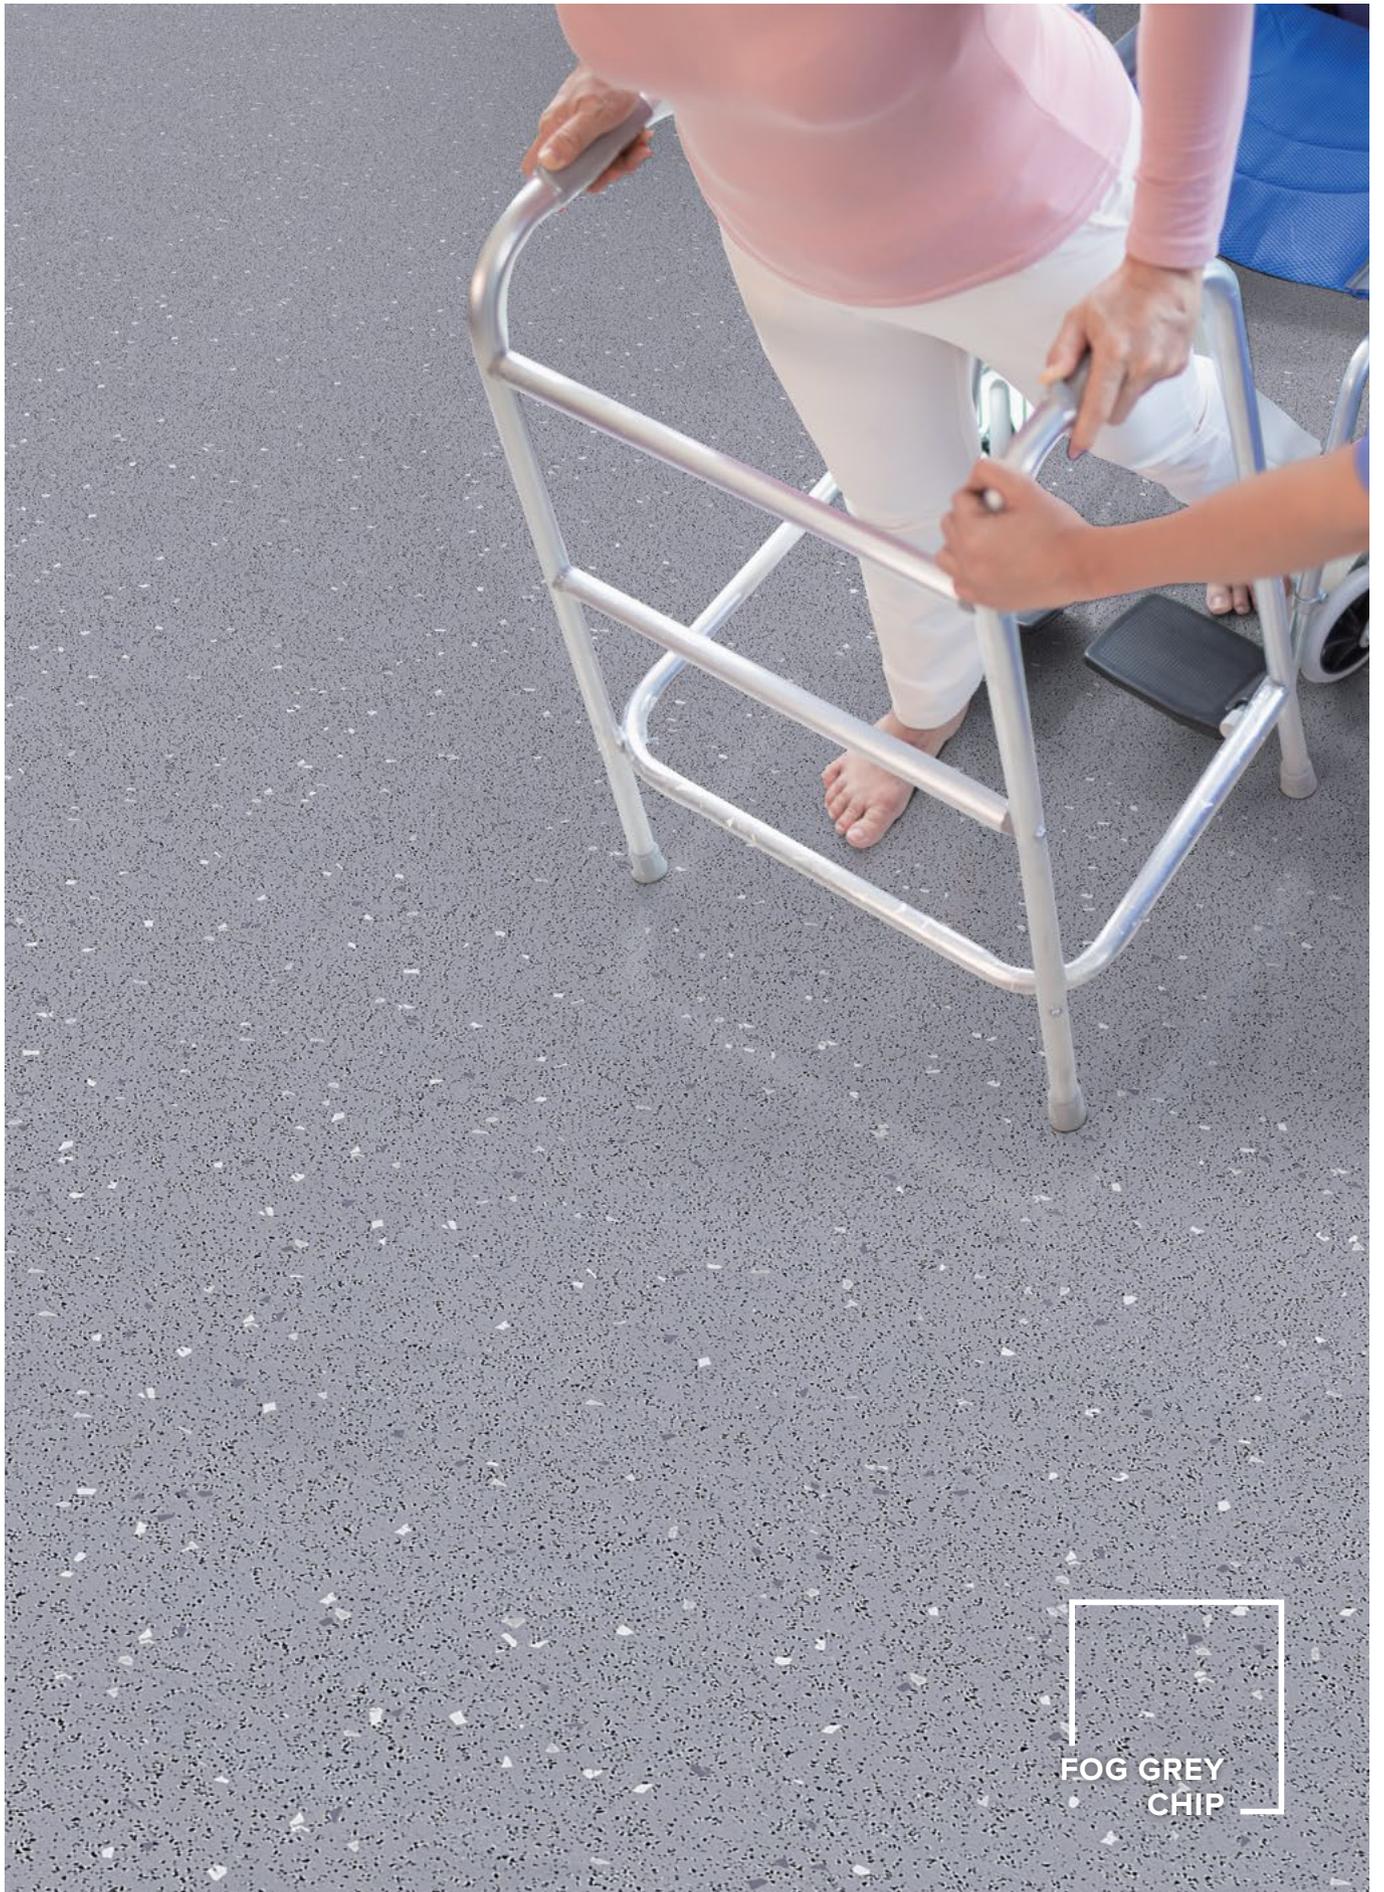


FOG GREY
CHIP



STONE TAUPE CHIP



FOG GREY CHIP

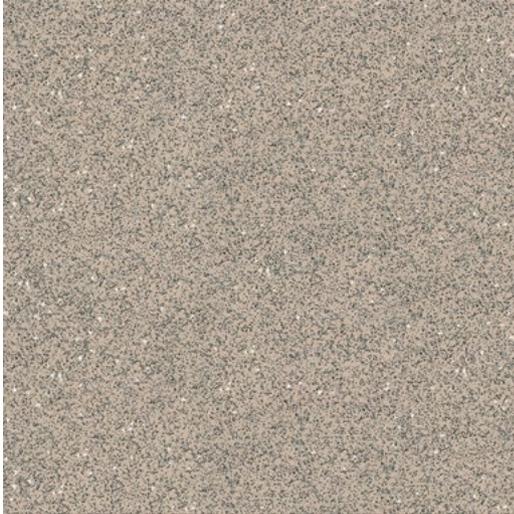

SANDY BEIGE CHIP



STORM GREY CHIP



AQUASAFE

TECHNICAL SPECIFICATIONS

TECHNICAL DATA		AQUASAFE
Flooring Type	EN 13845	Barefoot Safety Flooring
Warranty*	Commercial	15 years
Roll Dimensions	EN ISO 24341	2.0m x 20m
Overall Thickness	EN ISO 24346	2.0mm
Total Weight	EN ISO 23997	2.6kg/m ²
Classification (use area)	EN ISO 10874	Commercial: 34 (Very Heavy) Light Industrial: 43 (Heavy)
Residual Indentation	EN ISO 24343 - 1	≤0.10 mm
Wear Resistance	EN 13845	≤10% particles lost over 50,000 cycles
Slip Resistance	EN 13845 AS 4586 A AS 4586 C AS 4586 D	ESb & Esf P5 Class C
Flexibility	EN ISO 24344 Method A	Pass
Dimensional Stability	EN ISO 23999	≤0.4%
Chemical Resistance	EN ISO 26987	Good
Colour Fastness	EN ISO 105-B02 Method 3	≥6
Reaction to Fire	EN ISO 9239-1 EN 13501-1 EN ISO 11925-2	≥4.5kW/m ² Class Bfl-s1 Pass
Electrical Behaviour	EN 1815	≤2kV
Castor Chair	EN ISO 4918	Pass
Seam Strength	EN ISO 16906	Pass
Thermal Conductivity	EN 10456	0.25 W/m.K
TVOC Emissions	EN 16516	Approved
CE Marking	EN 14041:2004	Yes



Specifications are subject to manufacturing tolerances and may be changed without notice. Colour variation may occur between sample and supplied products due to dye lot tolerances.

*Warranty

The flooring has a 15 year limited warranty for latent manufacturing defects.

The above warranty is subject to the products being specified, installed and maintained in accordance with our recommendations (instructions available on request)



AIRLAY
floorcoverings

AIRLAY FLOORCOVERINGS

Head Office: 91-115 Link Drive, Campbellfield VIC 3061

Phone: (03) 9359 4705 Email: sales@airlay.com.au

AIRLAY.COM.AU