

# MARBLE EFFECTS

## HOMOGENEOUS PUR

### DESCRIPTION

Type of Floor Covering	EN ISO 10581	–	Homogeneous
Overall Thickness	EN 428	mm	2.00
Wear Layer Thickness	EN 429	mm	2.00
Total Weight	EN 430	g/m <sup>2</sup>	3300 g/m <sup>2</sup>
Roll Dimensions	EN 426	m <sup>2</sup>	2.0 x 20m = 40m <sup>2</sup>

### CLASSIFICATION

Classification	EN 685	class	Commercial: 34 Industrial: 43
Fire Rating	AS ISO 13501-1	–	Class Bfl-S1
	AS ISO 11925-2	–	Pass
	AS ISO 9239-1	–	≥8 kW/m <sup>2</sup>
VOC Emissions	ISO 16000	–	Pass
Electrical Resistance	EN 1815	kv	<2kv
	EN 1081	–	>10 <sup>9</sup> Ω
Slip Resistance	AS 4586	–	P3
	DIN 51130	–	R10

### PERFORMANCE

Abrasion Resistance	EN 649	–	Group P
Dimensional Stability	EN 434	%	≤ 0.40%
Residual Indentation	EN 433	mm	Ave. Value ≤ 0.1mm
Colour Fastness	EN ISO - 105 - B02	degree	≥6 degree
Chemical Resistance	EN 423	–	Good Resistance
Castor Wheel Test	EN 425	–	Suitable
Impact Sound Reduction	EN ISO 717/2	dB	Approx. +4 dB
Flexibility	EN 435	–	Excellent
Anti-bacterial and fungicidal	MRSA	–	Good
	DIN EN ISO 846 - A/C	–	Good
Underfloor Heating	–	°C	Suitable - Max. 27°C
Surface Treatment	–	–	PUR


Specifications are subject to manufacturing tolerances and may be changed without notice. Colour variation may occur between sample and supplied products due to dye lot tolerances.



Honey 3308-2521



Slate 3321-2516

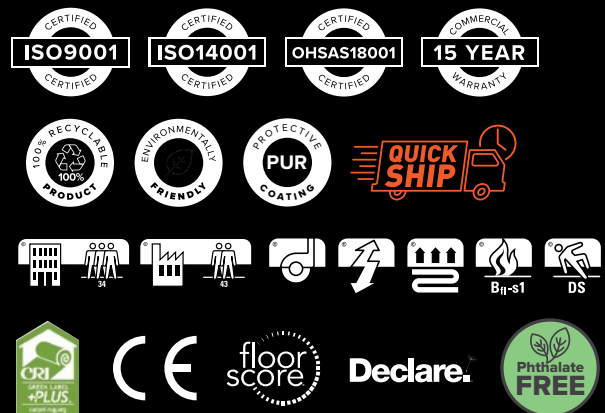

AIRLAY 

**AIRLAY FLOORCOVERINGS**

Head Office: 91-115 Link Drive, Campbellfield VIC 3061

Phone: (03) 9359 4705 Email: sales@airlay.com.au

**AIRLAY.COM.AU**