

SHEET
VINYL

NATURAL SELECTIONS WOOD

HETEROGENEOUS

AIRLAY
floorcoverings

NATURAL SELECTIONS WOOD

Natural Selections Wood is inspired by the beautiful patterns and textures found in leaves, stones and water, with 8 wood floor designs to bring the essence of nature to your floor.

The Natural Selections Wood range isn't just beautiful – it's a practical and durable choice for everyday life and helps create a space that promotes peace and relaxation.




BLEACHED
OAK



LIMED ASH



NATURAL
WALNUT

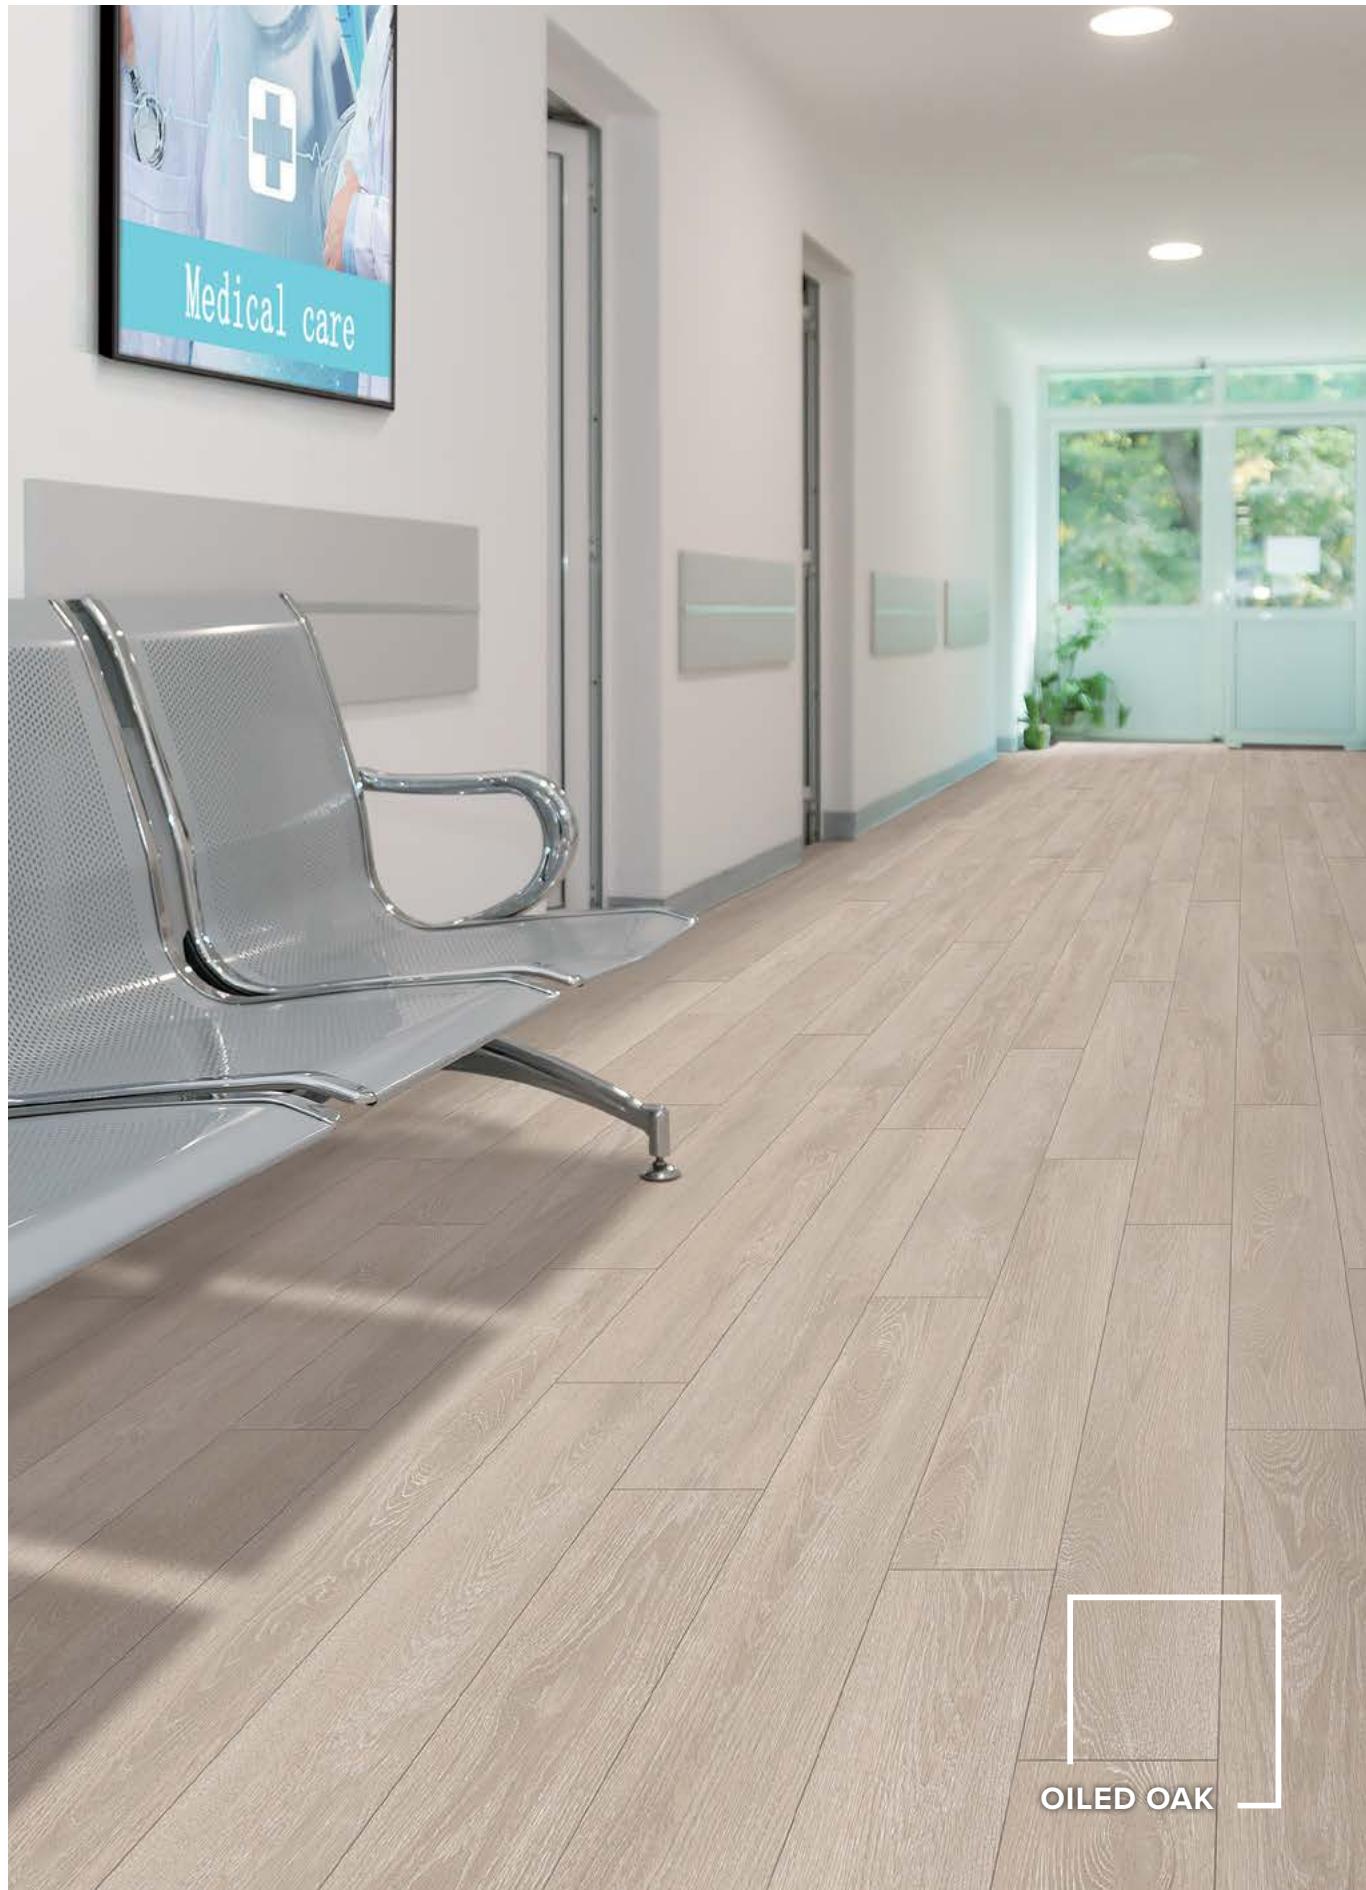

OILED OAK



OYSTER
ASH




FAWN
WALNUT

HONEY
WALNUT





CHAMPAGNE
ASH




Oiled Oak



Natural Walnut



Honey Walnut

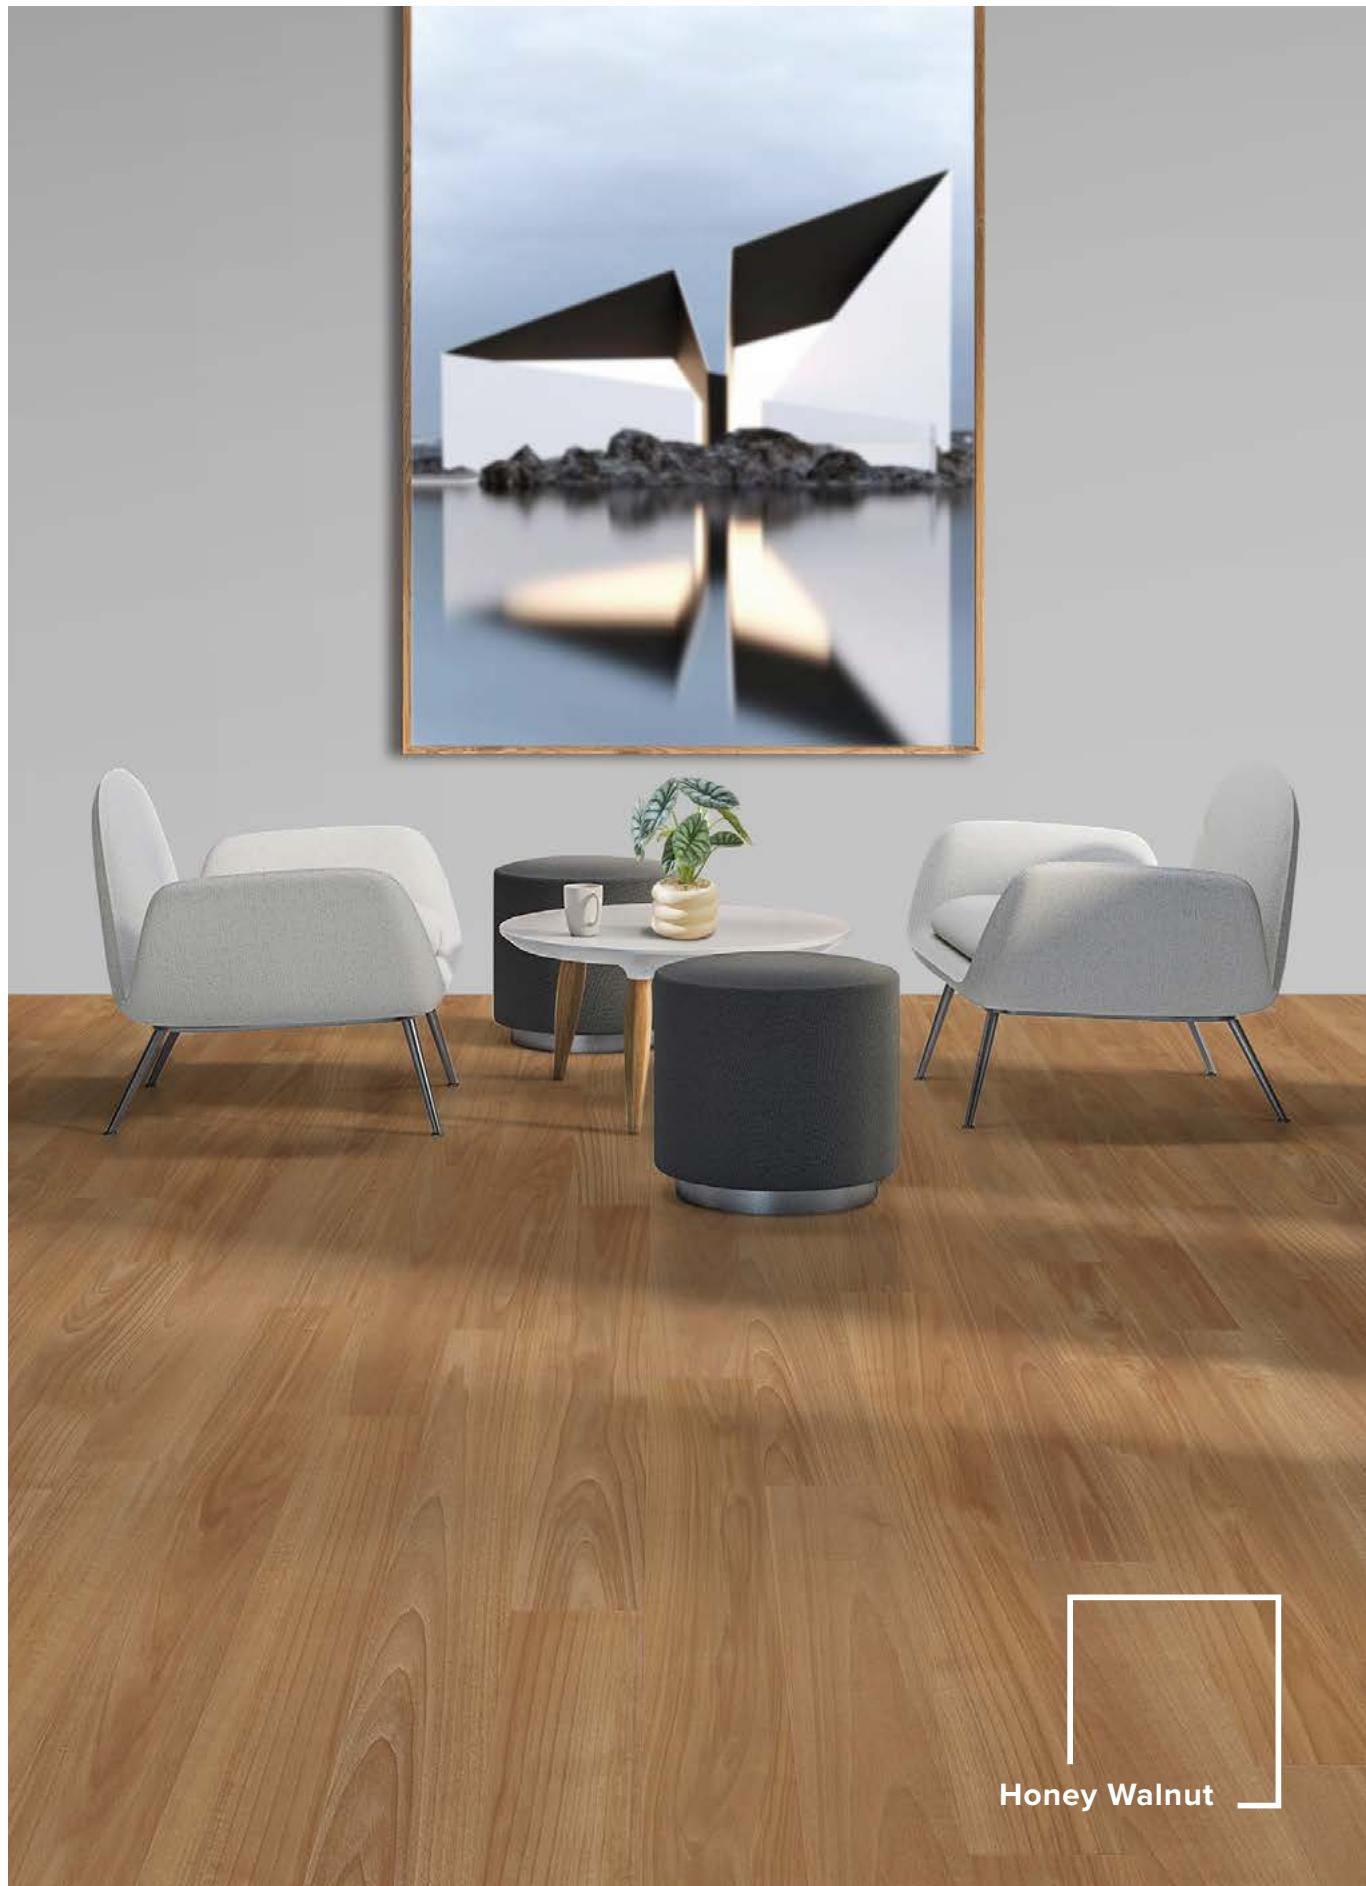

Honey Walnut



Fawn Walnut



Bleached Oak



Bleached Oak



Champagne Ash



Limed Ash



Oyster Ash &
Honey Walnut



Oyster Ash



Oiled Oak
& Natural Walnut



Champagne Ash



HONEY WALNUT



NATURAL WALNUT



FAWN WALNUT



BLEACHED OAK



LIMED ASH



CHAMPAGNE ASH



OYSTER ASH



OILED OAK



NATURAL SELECTIONS WOOD

Flooring Type	Heterogeneous Vinyl Sheet	
Warranty*	Commercial 15 yrs Residential 25 yrs	
Roll Dimensions	ISO 24342 (EN 427)	2.0m x 20m = 40m ²
Overall Thickness	ISO 24346 (EN 428)	2.0mm
Wear Layer	ISO 24340 (EN 429)	0.70mm
Total Weight	ISO 23997 (EN 430)	3.05 kg/m ²
Surface Treatment	PUR	
Classification (use area)	ISO 10874 (EN 685)	23, 34, 43
General Performance	EN 13845 ASTM F1303	Conforms Type I, Grade I, Class B Backing
Reaction to fire	EN 13501-1 AS ISO 9239.1 ASTM E648	Class Bfl-S1 ≥4.5kW/m ² Class 1
Slip Resistance	AS 4586	P3 / R10
Static Electrical Propensity	EN 1815	Antistatic ≤ 2.0kV
Binder Content	ISO 10582	Type I
Abrasion Resistance	EN 649	Group T
Residual Indentation	ISO 24343-1 (EN 433) ASTM F970 ASTM F1914	≤0.10mm <0.005" (1,000 psi) <0.005"
Castor Chair	ISO 4918 (EN 425)	Suitable
Colour Fastness	ISO 105-B02	Method 3 ≥ 6
Light Resistance	Heat Resistance ASTM F1514	E ≤ 8
Heat Resistance	ASTM F1514	E ≤ 8
Dimensional Stability	ISO 23999 (EN 434)	≤ 0.40%
Chemical Resistance	ASTM F925 ISO 26987 (EN 423)	Pass Good
Flexibility	ASTM F137 ISO 24344 (EN 435)	Pass Pass 20mm Ø
Underfloor Heating	Suitable - max 27°C	
Impact Sound Reduction	ISO 10140-3	4dB
Dynamic Rolling Load	ASTM F2753	Passes (25,000 cycles)
Resistance to Fungi	ASTM G21	No Growth
VOC Emissions	Indoor Air Quality FloorScore	Very low emissions Certified
Recycled Content	15%	
Recyclable	100%	
CE Marking	EN 14041:2004	Yes



COMMERCIAL WARRANTY



RESIDENTIAL WARRANTY



WEAR LAYER



ENVIRONMENTAL
PRODUCT DECLARATION
PAID ON-CE



*Warranty

The flooring has a 15 year commercial and 25 year residential warranty for latent manufacturing defects. The warranty is subject to the products being specified, installed and maintained in accordance with our recommendations.

Specifications are subject to manufacturing tolerances and may be changed without notice. Colour variation may occur between sample and supplied products due to dye lot tolerances.