



ULTRA CRYSTAL COLLECTION

SHEET
VINYL

HOMOGENEOUS PUR

AIRLAY[®]

ULTRA CRYSTAL COLLECTION

HOMOGENEOUS PUR

Ultra Crystal PUR is inspired by the luscious patterns of quartz for a crystal finish on the floor. An ultra-compacted premium surface provides resilient flooring for high traffic commercial interiors.

Delivering ease of maintenance, anti-bacterial and fungicidal benefits as well as PUR coating for longevity.




CHIVE 2712




SUNRISE 2701



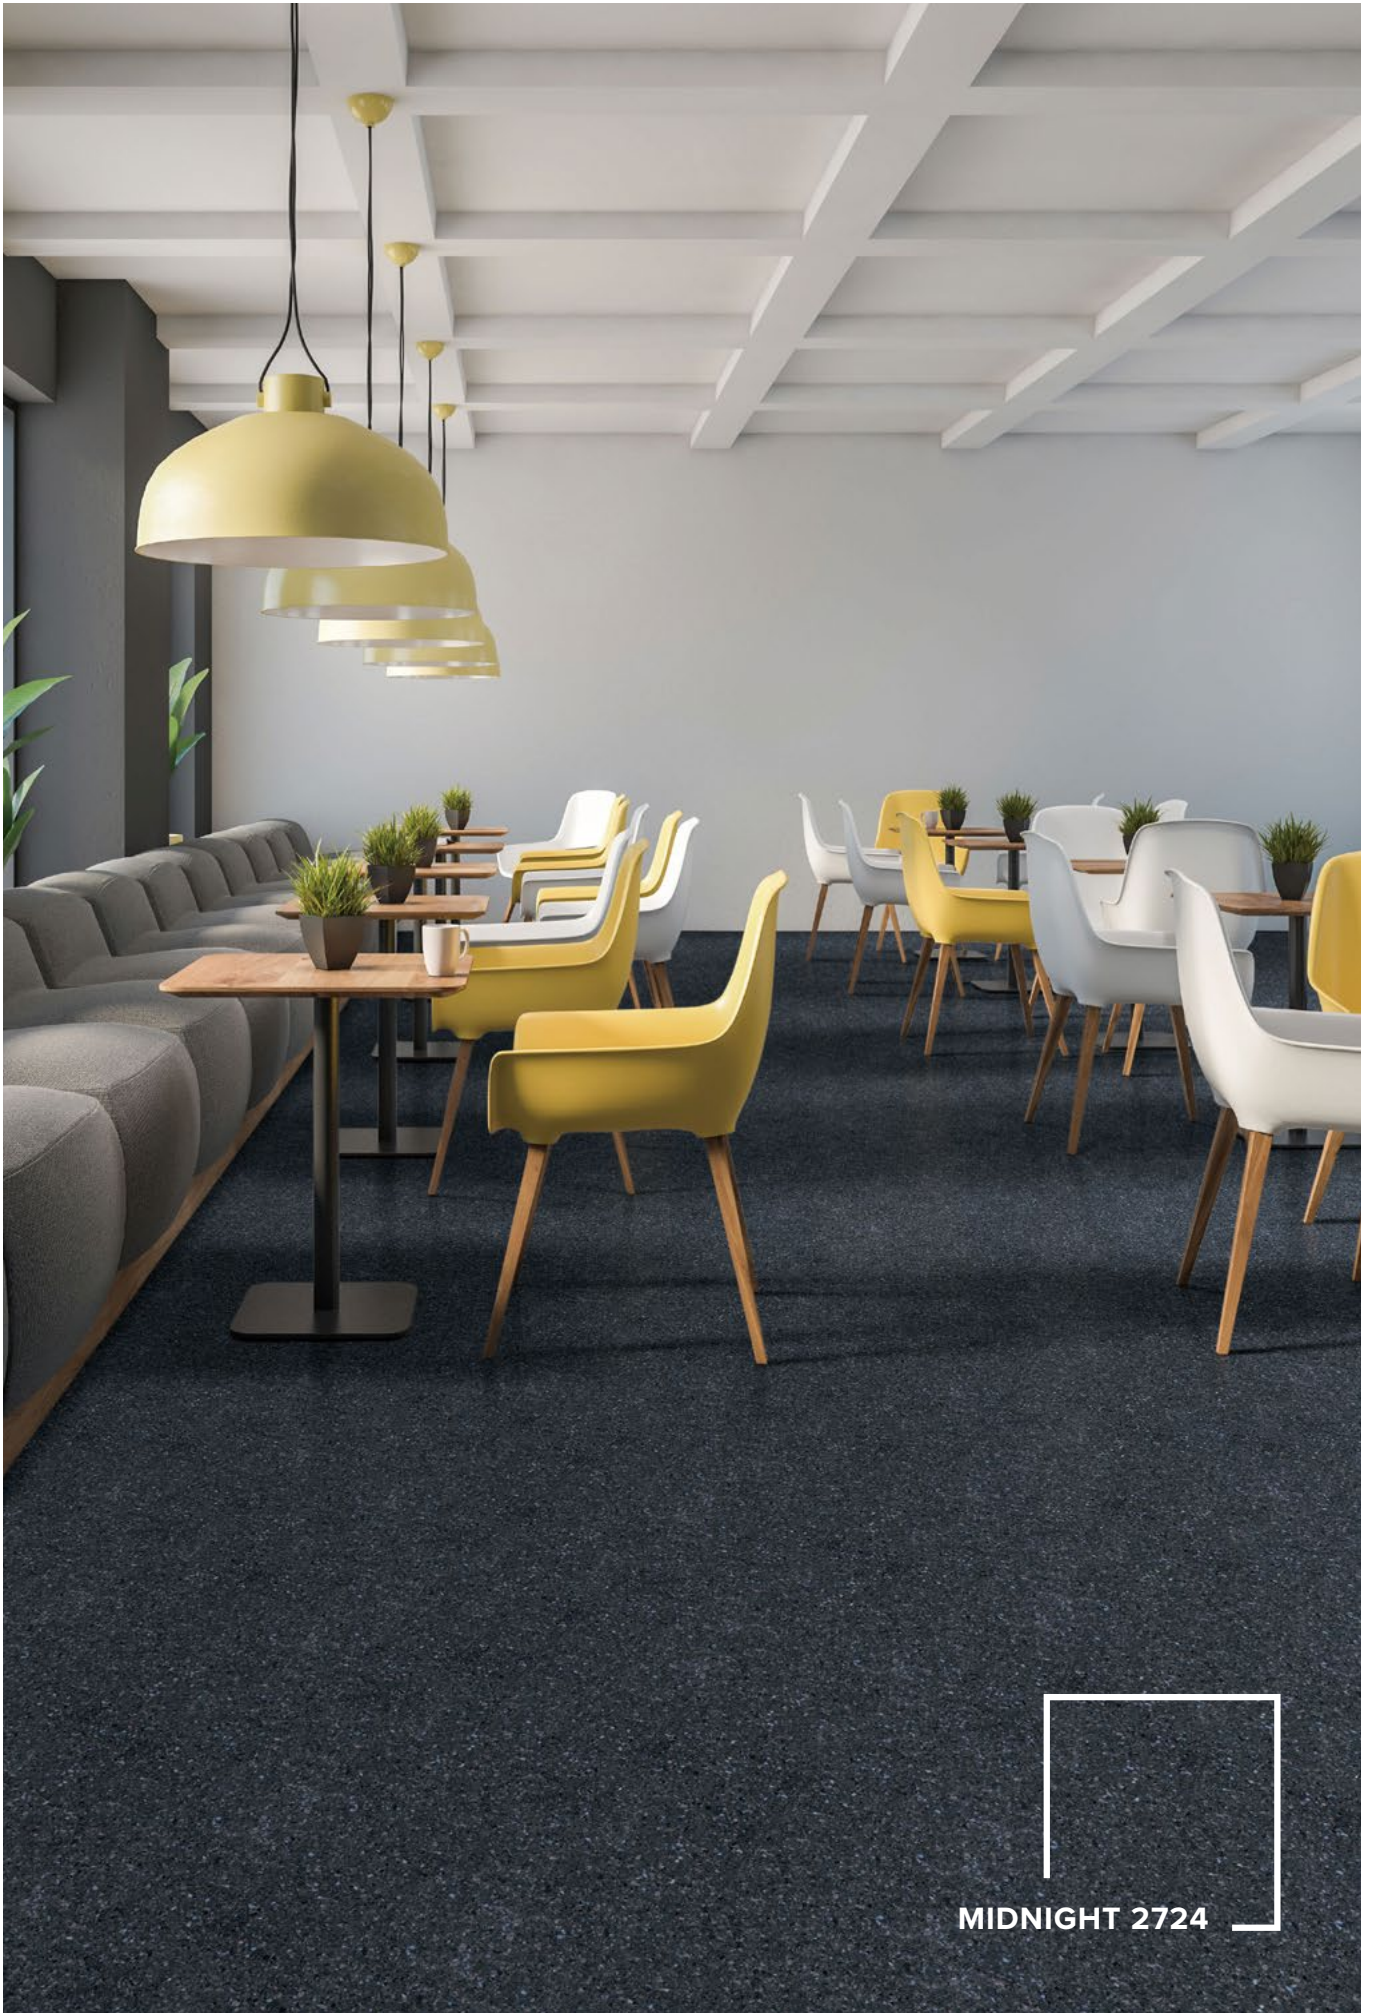

MIDNIGHT 2724




RUBY 2705



OYSTER 2721





LATTE 2714



SHELL GREY 2723



LAGOON 2708

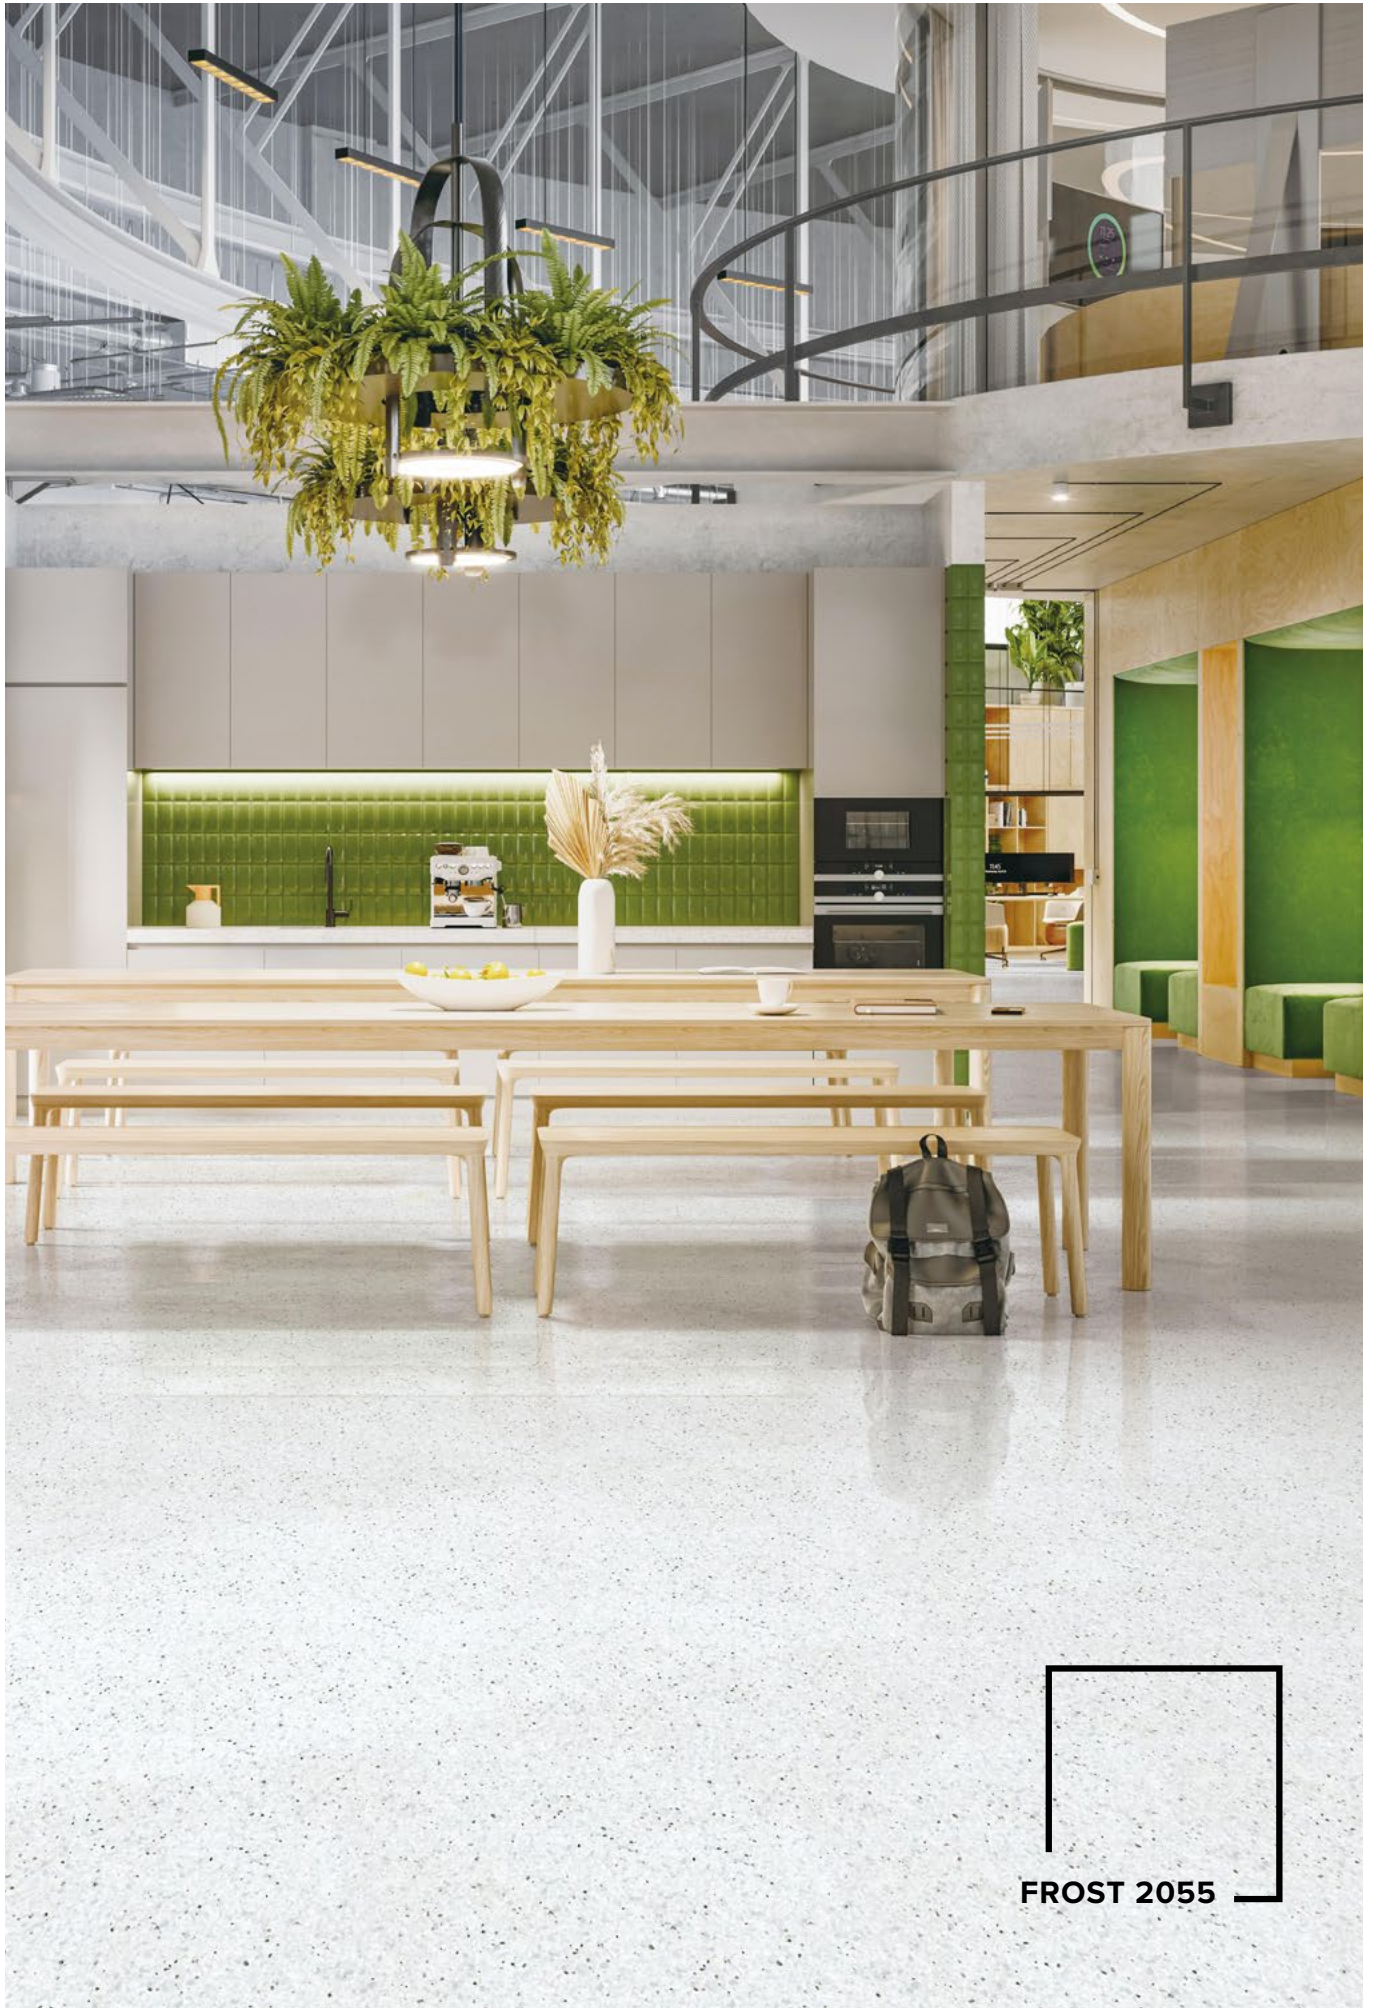

FROST 2055



SEA 2709



PEARL 2052




FROST 2055



PEARL 2052




OYSTER 2721

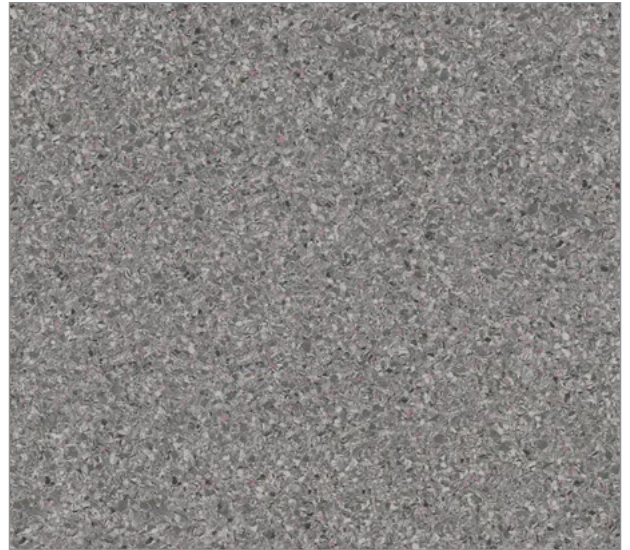

SHELL GREY 2723



MIDNIGHT 2724

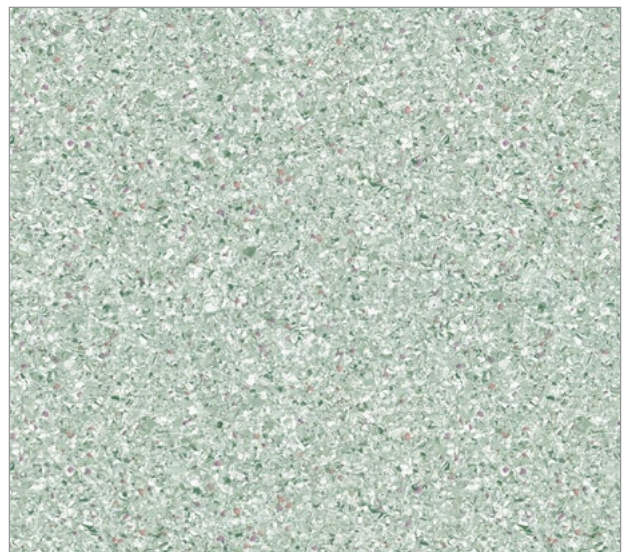

CHIVE 2712






LATTE 2714



CAPPUCCINO 2715



SEA 2709

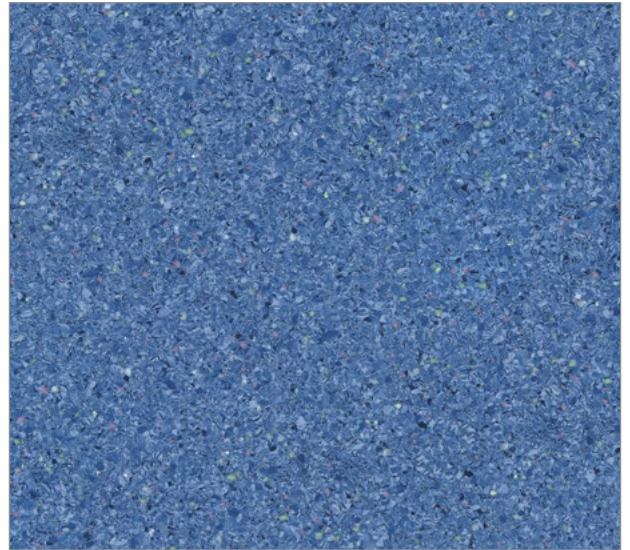

LAGOON 2708



SUNRISE 2701



RUBY 2705



ULTRA CRYSTAL

HOMOGENEOUS PUR

DESCRIPTION

Type of Floor Covering	EN ISO 10581	–	Homogeneous
Overall Thickness	EN 428	mm	2.00
Wear Layer Thickness	EN 429	mm	2.00
Total Weight	EN 430	g/m ²	2950 g/m ²
Roll Dimensions	EN 426	m ²	2.0 x 20m = 40m ²

CLASSIFICATION

Classification	EN 685	class	Commercial: 34 Industrial: 43
Fire Rating	AS ISO 13501-1	–	Class Bfl-S1
	AS ISO 11925-2	–	Pass
	AS ISO 9239-1	–	≥8 kW/m ²
VOC Emissions	ISO 16000	–	Pass
Electrical Resistance	EN 1815	kv	<2kv
	EN 1081	–	>10 ⁹ Ω
Slip Resistance	AS 4586	–	P3
	DIN 51130	–	R10

PERFORMANCE

Abrasion Resistance	EN 649	–	Group T
Dimensional Stability	EN 434	%	≤ 0.40%
Residual Indentation	EN 433	mm	Ave. Value ≤ 0.1mm
Colour Fastness	EN ISO - 105 - B02	degree	≥6 degree
Chemical Resistance	EN 423	–	Good Resistance
Castor Wheel Test	EN 425	–	Suitable
Impact Sound Reduction	EN ISO 717/2	dB	Approx. +4 dB
Flexibility	EN 435	–	Excellent
Anti-bacterial and fungicidal	MRSA	–	Good
	DIN EN ISO 846 - A/C	–	Good
Underfloor Heating	–	°C	Suitable - Max. 27°C
Surface Treatment	–	–	PUR

Specifications are subject to manufacturing tolerances and may be changed without notice.
Colour variation may occur between sample and supplied products due to dye lot tolerances.



Ruby 2705



Lagoon 2708



AIRLAY

AIRLAY FLOORCOVERINGS

Head Office: 91-115 Link Drive, Campbellfield VIC 3061

Phone: (03) 9359 4705 Email: sales@airlay.com.au

AIRLAY.COM.AU