

**WOOD**  
**IMPRESSIONS**  
**COLLECTION**

SHEET  
VINYL

AIRLAY 

# WOOD IMPRESSIONS COLLECTION



ASH  
2208



HARVEST  
2206



NATURAL  
2205



BUTTERNUT  
2201



ARCTIC  
2122



RAWHIDE  
2203



BARK  
2125





AURORA  
2123



**ARCTIC - 2122**



**AURORA - 2123**



**ASH - 2208**




**RAWHIDE - 2203**



**HARVEST - 2206**



**NATURAL - 2205**

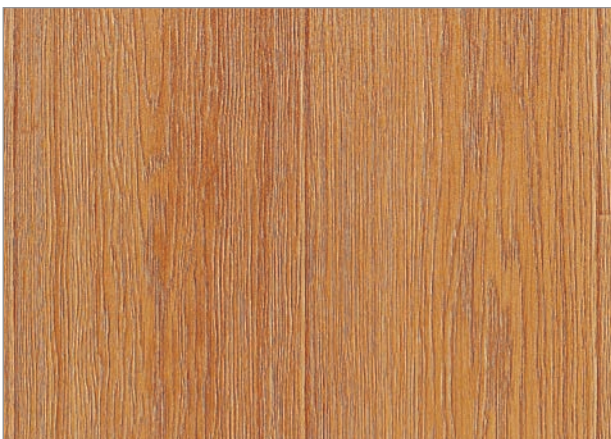

**BUTTERNUT - 2201**



**BARK - 2125**

# WOOD IMPRESSIONS

## DESCRIPTION

Type of Floor Covering	EN649/EN ISO 10582	–	Heterogeneous
Overall Thickness	EN428/ISO 24346	mm	2.00
Wear Layer Thickness	EN429/ISO 24340	mm	0.55
Total Weight	EN 430	g/m <sup>2</sup>	2850 g/m <sup>2</sup>
Roll Dimensions	EN 426	m <sup>2</sup>	2.0 x 20m = 40m <sup>2</sup>

## CLASSIFICATION

Classification	EN 685	class	Commercial: 34 Industrial: 43
Fire Rating	AS ISO 13501-1 AS ISO 11925-2 AS ISO 9239-1	–	Class Bfl-S1 Pass ≥8 kW/m <sup>2</sup>
VOC Emissions	ISO 16000	–	Pass
Electrical Resistance	EN 1815 EN 1081	kv –	<2kv >10 <sup>9</sup> Ω
Slip Resistance	AS 4586 DIN 51130	– class	R10 R10

## PERFORMANCE

Abrasion Resistance	EN 649/EN660-2	–	Group T
Dimensional Stability	EN434/ISO 23999	%	≤ 0.40%
Residual Indentation	EN433/ISO 24343:1	mm	Ave. Value ≤ 0.1mm
Colour Fastness	EN ISO - 105 - B02	degree	≥6 degree
Chemical Resistance	EN 423	–	Good Resistance
Castor Wheel Test	EN 425	–	Suitable
Impact Sound Reduction	EN ISO 717/2	dB	Approx. +4 dB
Flexibility	EN 435/ISO 24344	–	Excellent
Anti-bacterial and fungicidal	MRSA DIN EN ISO 846 -A/C	– –	Good Good
Underfloor Heating	–	°C	Suitable - Max. 27°C
Surface Treatment	–	–	PUR
CE Marking	EN 14041	–	CE Marking

Specifications are subject to manufacturing tolerances and may be changed without notice. Colour variation may occur between sample and supplied products due to dye lot tolerances.



Declare.



AIRLAY

WWW.AIRLAY.COM.AU

AIRLAY FLOORCOVERINGS

Head Office: 25-27 Lakeside Drive Broadmeadows, VIC 3047

Phone: (03) 9359 4705 Email: sales@airlay.com.au