

## TECHNICAL DATA SHEET

# SILICONE RELEASE TAPE

**Valid from June 2022**  
Subject to change without notification

## PERFORMANCE CHARACTERISTICS

### Extremely low smoke and odour

- less distress for the installer, building occupants and pets
- less chance of smoke alarms activating

### Backed with a Super Release silicon coating

- for easier release over foam underlays
- making SureSeam® quicker and easier to handle

### Heat-resistant hotmelt formulation

- older style carpet tapes can re-open in direct summer heat
- Sureseam® is formulated with 'heat resistance' to prevent seams re-opening

### Wide centre-bead puts 22% more hotmelt on the seam

- seam centre is held down to reduce visible peaking

### Hotmelt and fibreglass are 'pressure bonded' together

- the fibreglass and hotmelt are pressure bonded together in manufacture
- this pressure bond makes SureSeam® a stronger joining tape

### 9 picks/inch of double stranded fibreglass

- greater seam strength is achieved with more fibreglass
- fibreglass strands are laid straight, without warp, or bow. This eliminates tension release on stretching.

## CONSTRUCTION


- 90mm flat Kraft backing paper
- Super Release silicone coating on paper reverse side
- 65mm fibreglass and cotton knitted scrim
- 9 ppi (picks per inch) double stranded fibreglass
- Straight laid fibreglass strands
- 65mm hotmelt coating with an 18mm wide centre bead

## PHYSICAL DATA

**Packaging:** 100m rolls

**Coverage:** 100 lineal meters of carpet seams

**Weight:** 5.5kg approx. per roll

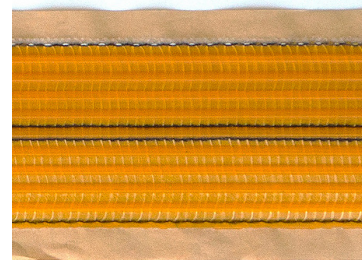

## INSTALLATION INSTRUCTIONS

### • Install as per Australian Standards

### • Recommendations for use

- in domestic and commercial installations, where there is light, medium and heavy foot traffic
- to seam tufted and woven carpets with both tight and open weave backings
- with Jute and ActionBac carpets, as well as many synthetic backings\*

(\*if in doubt, conduct a seaming test on an offcut of carpet before seaming.)

## AIRLAY FLOORCOVERINGS

**Head Office:** 91-115 Link Drive, Campbellfield VIC 3061 **Phone:** (03) 9359 4705 **Email:** sales@airlay.com.au  
**airlay.com.au**